


# Social Media & Text Analysis

## lecture 8 - Vector Semantics




**CSE 5539-0010 Ohio State University**

**Instructor: Wei Xu**


**Website: [socialmedia-class.org](http://socialmedia-class.org)**

some slides are adapted from Michael Collins, Dan Jurafsky, Richard Socher,, Chris Manning

# NLP Pipeline

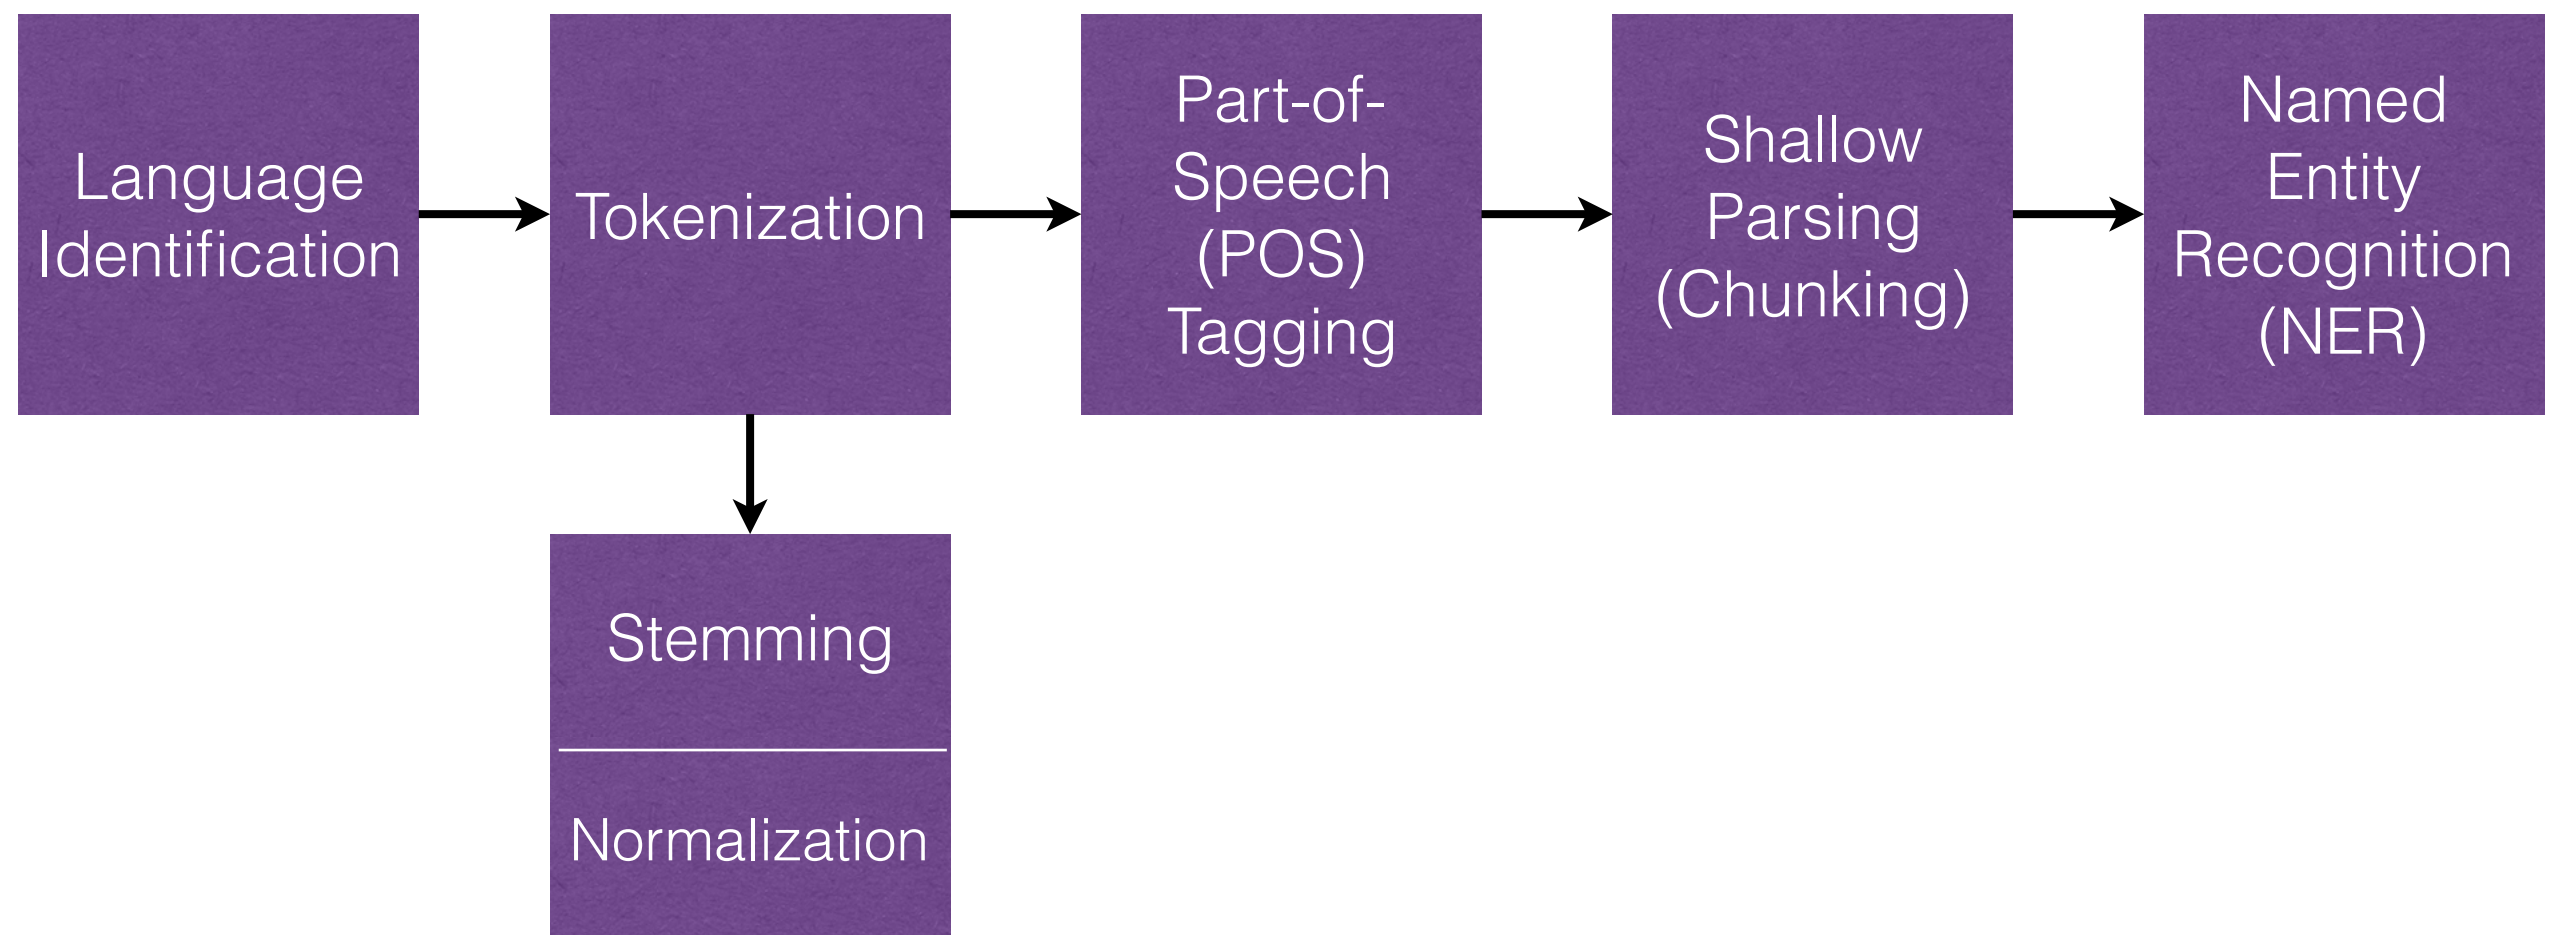

# NLP Pipeline

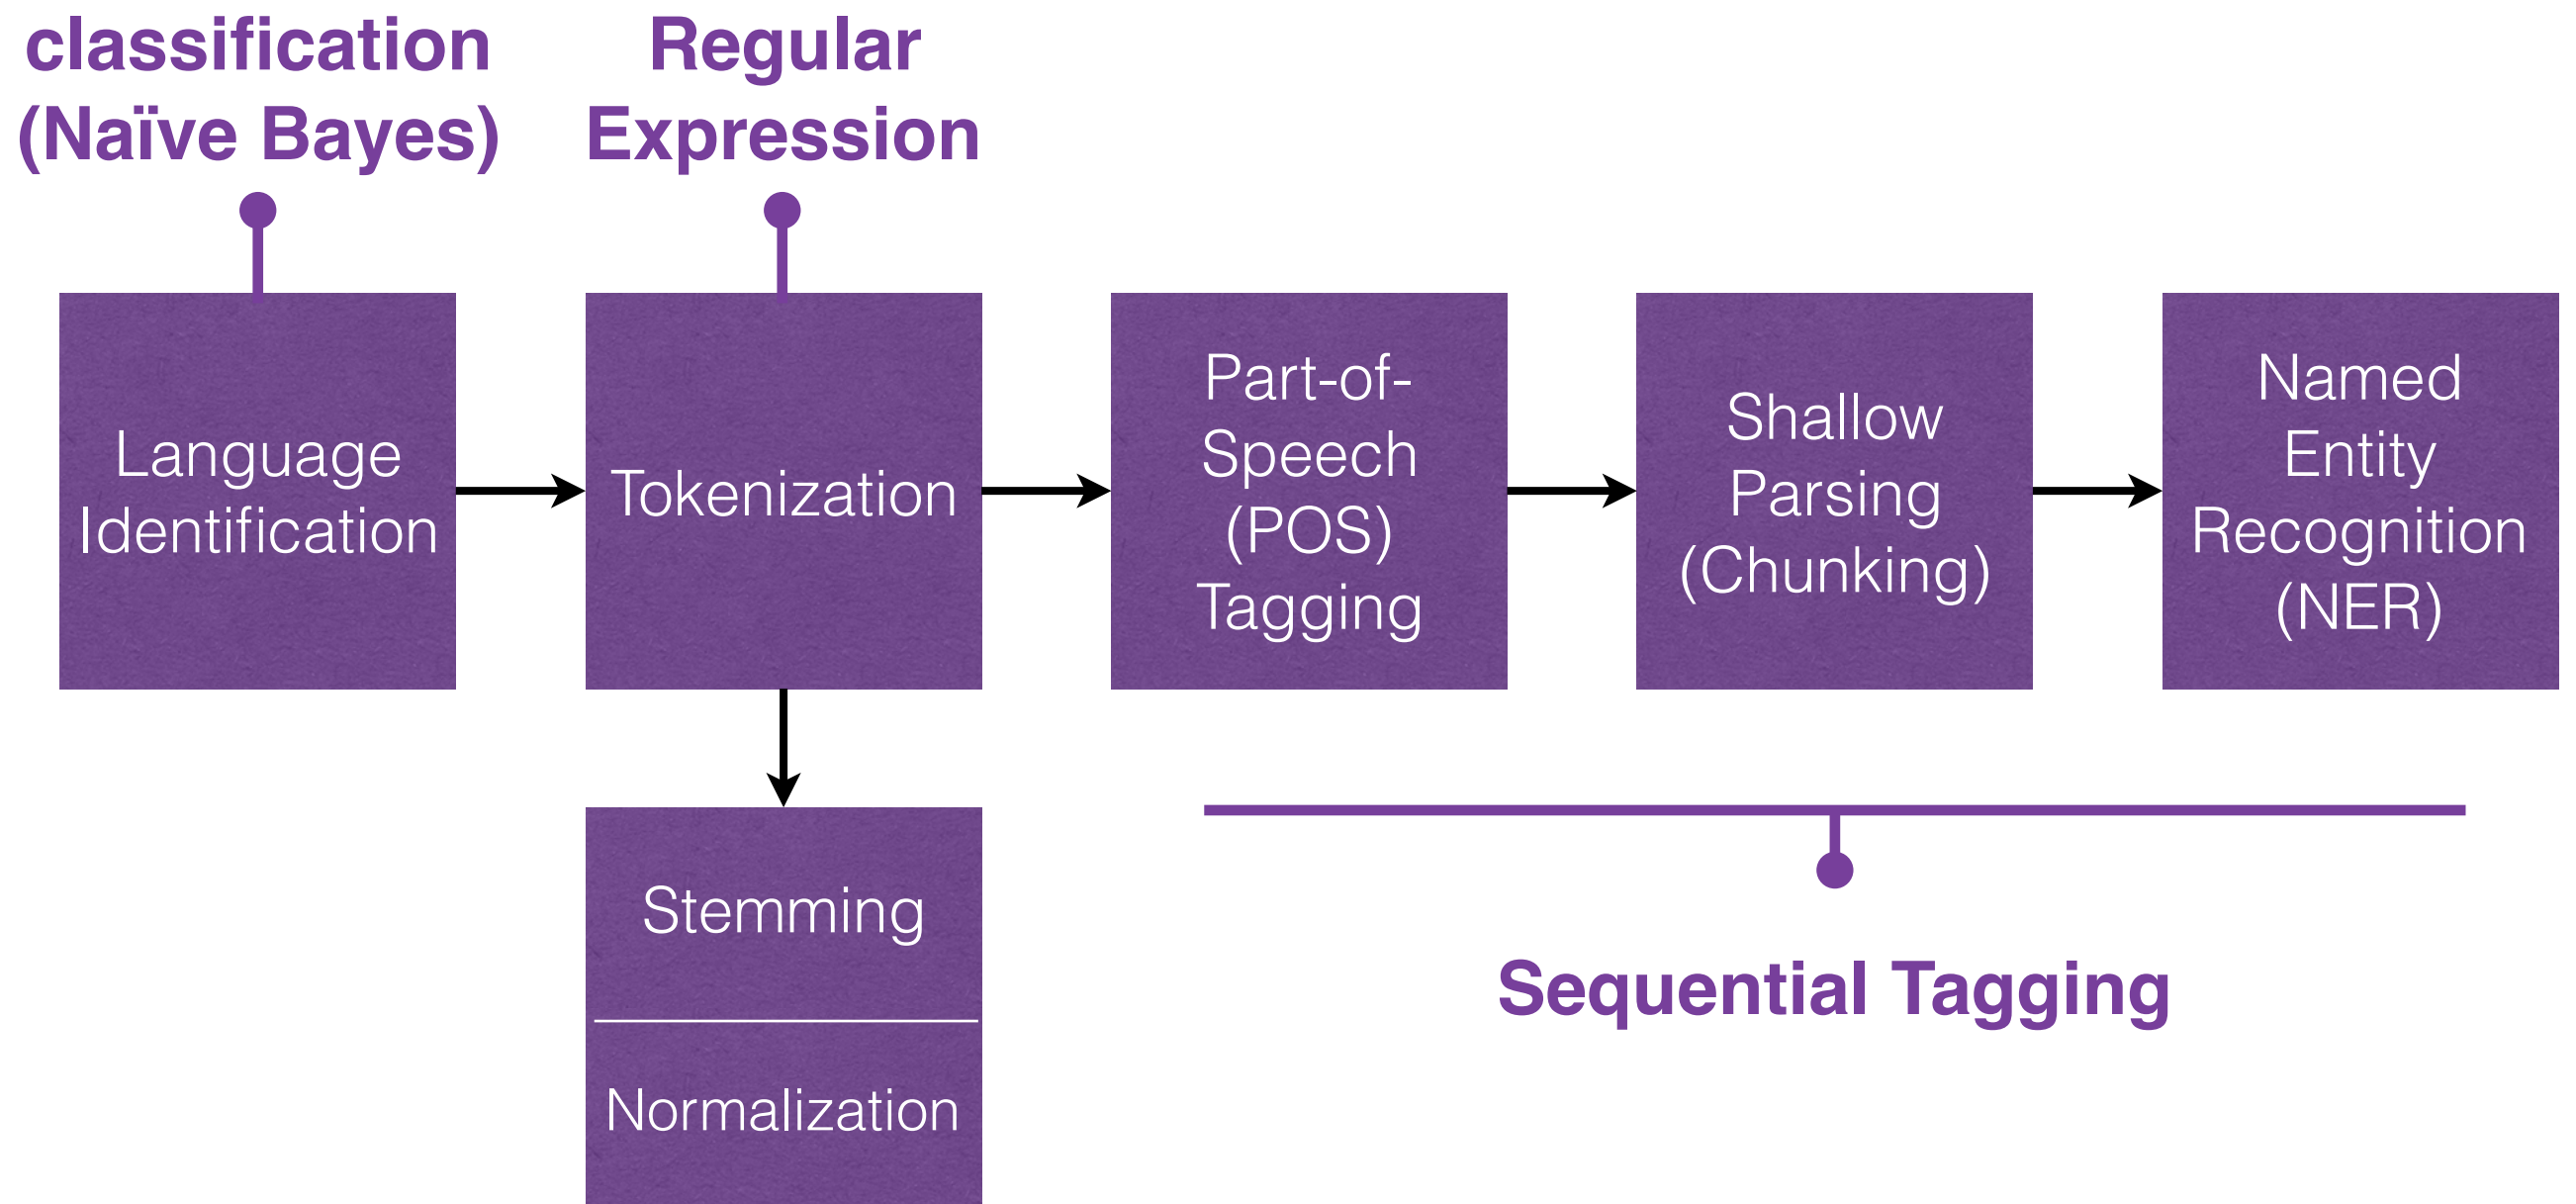

# Part-of-Speech (POS) Tagging

Cant	MD
wait	VB
for	IN
the	DT
ravens	NNP
game	NN
tomorrow	NN
...	:
go	VB
ray	NNP
rice	NNP
!!!!!!!	.




# Named Entity Recognition

sportsteam sportsteam geo-loc  
India vs Australia 2014-15 , 4th Test in Sydney


company product  
Samsung to launch Galaxy S6 in March

tvshow tvshow  
New Suits and Brooklyn Nine-Nine tomorrow ... Happy days

# Timeline of NLP on Microblogs

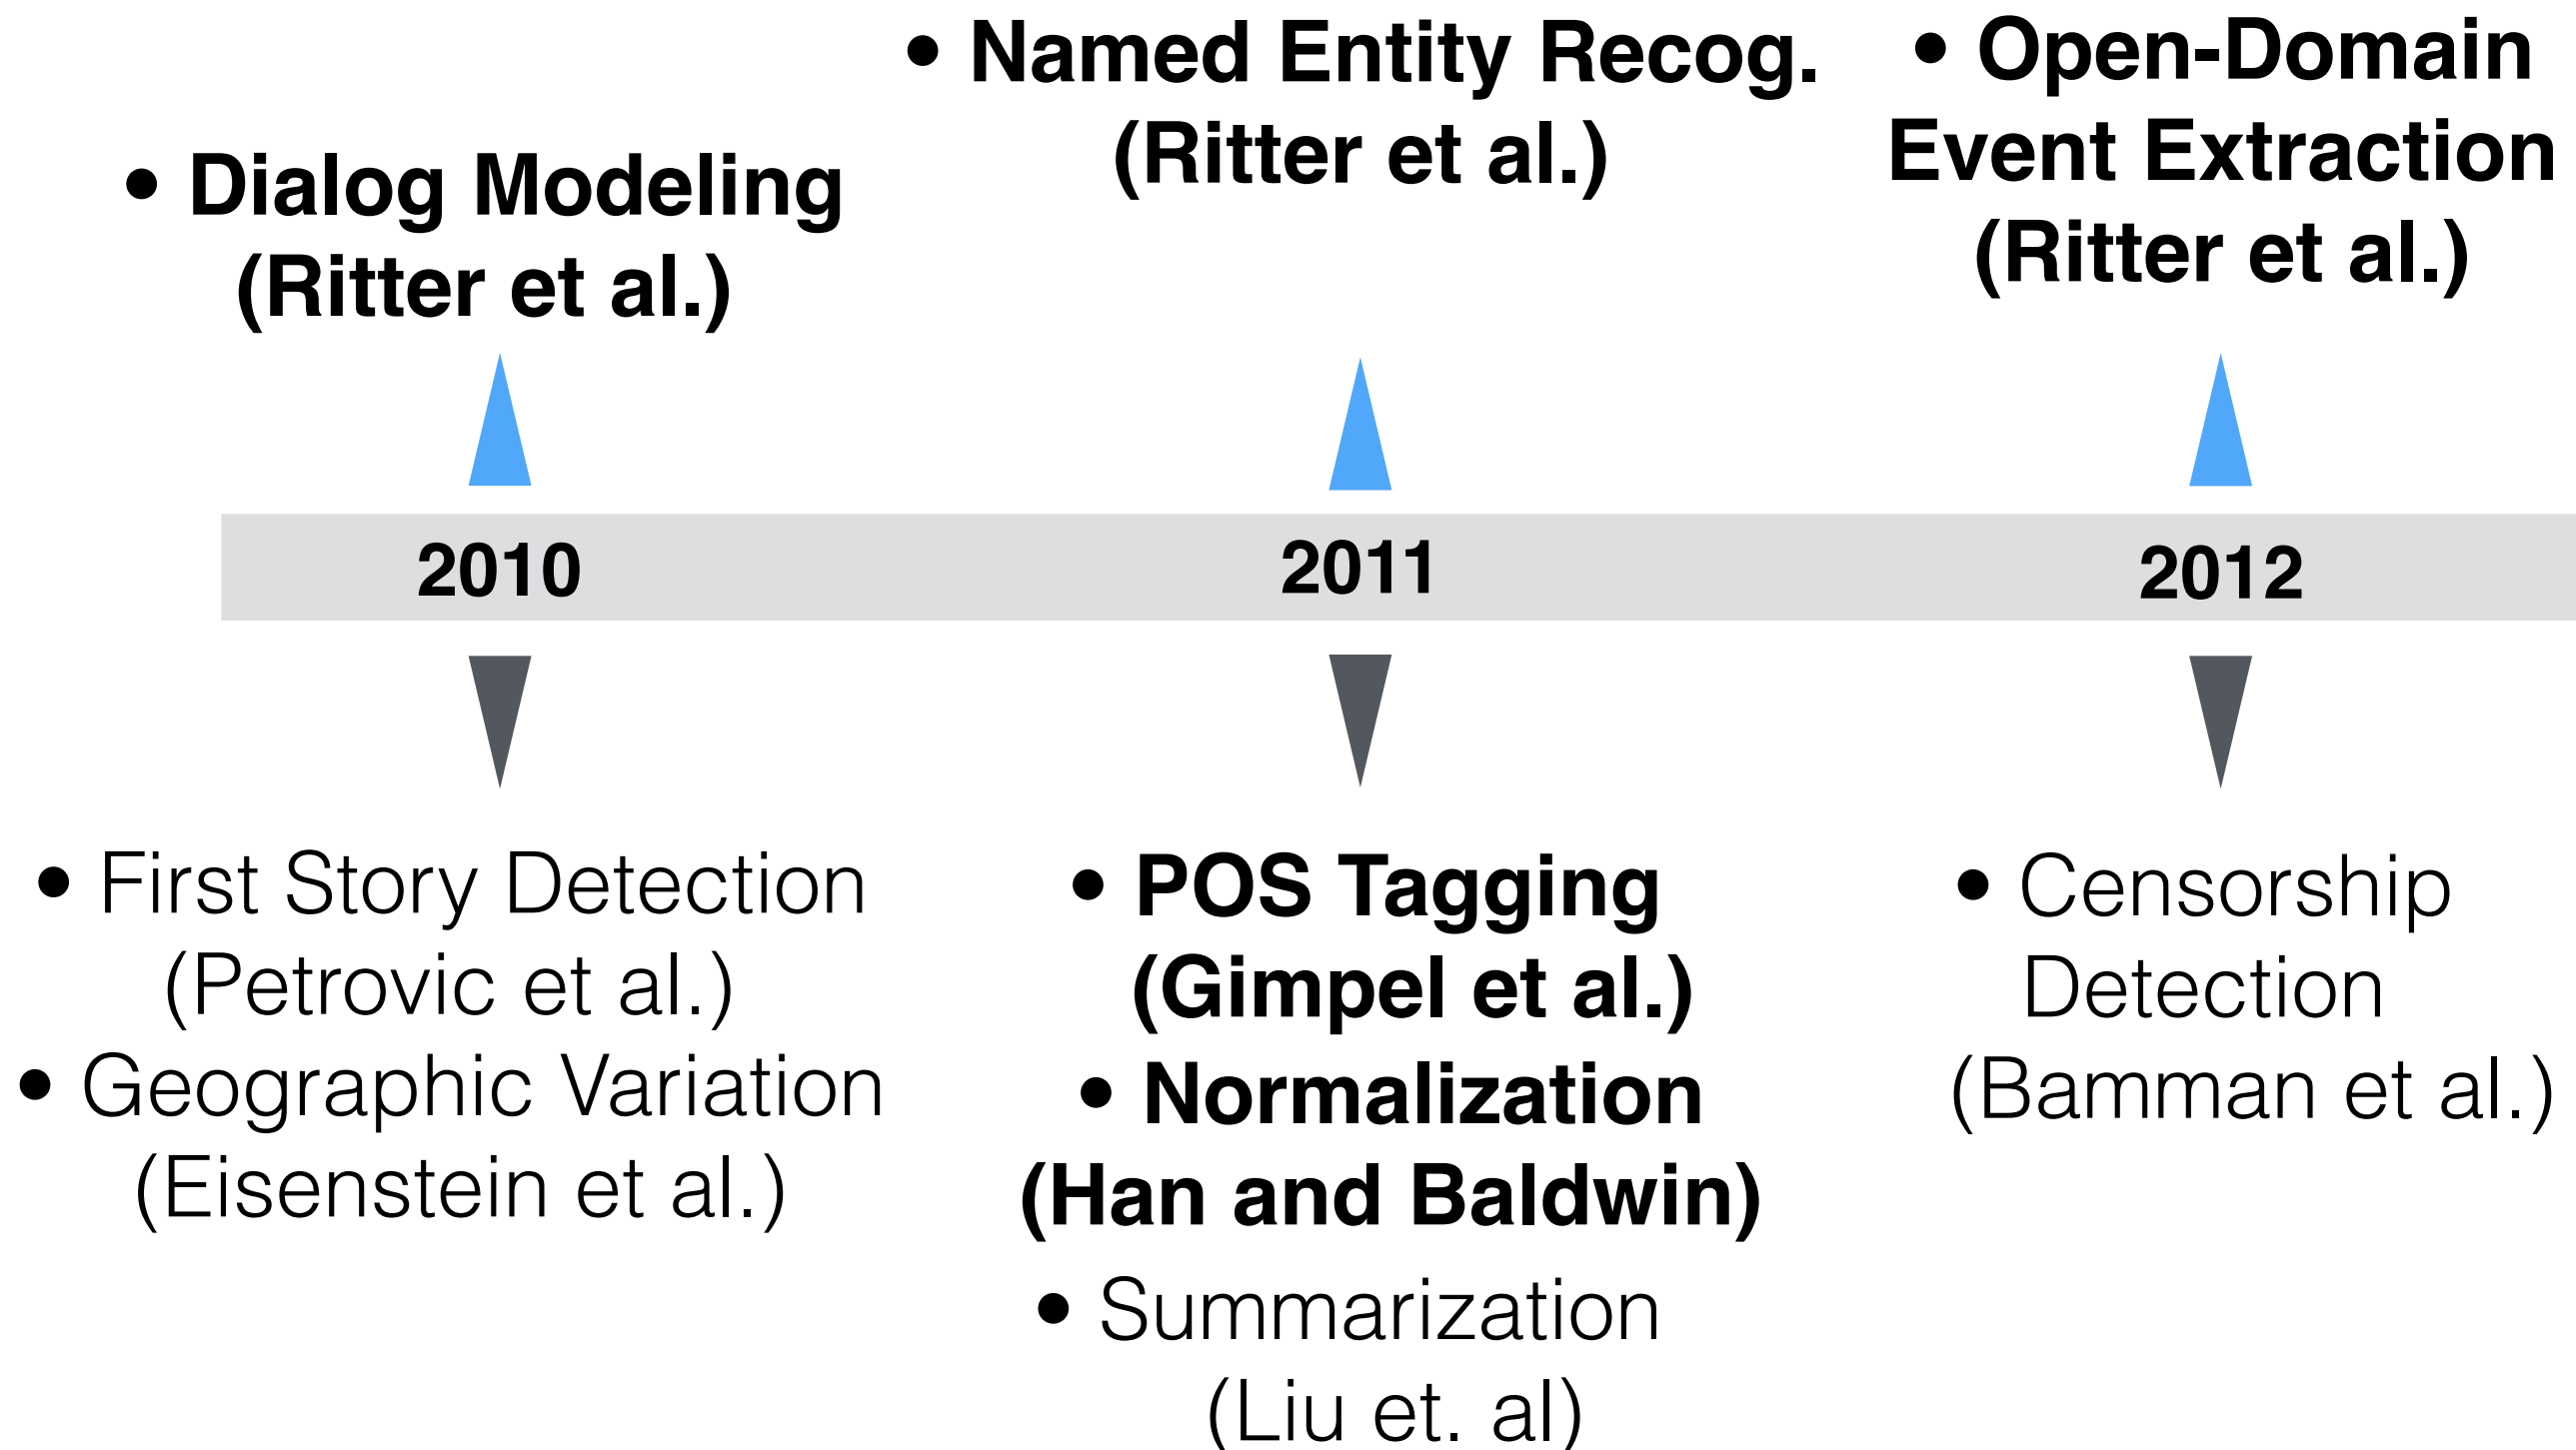

# Timeline of NLP on Microblogs

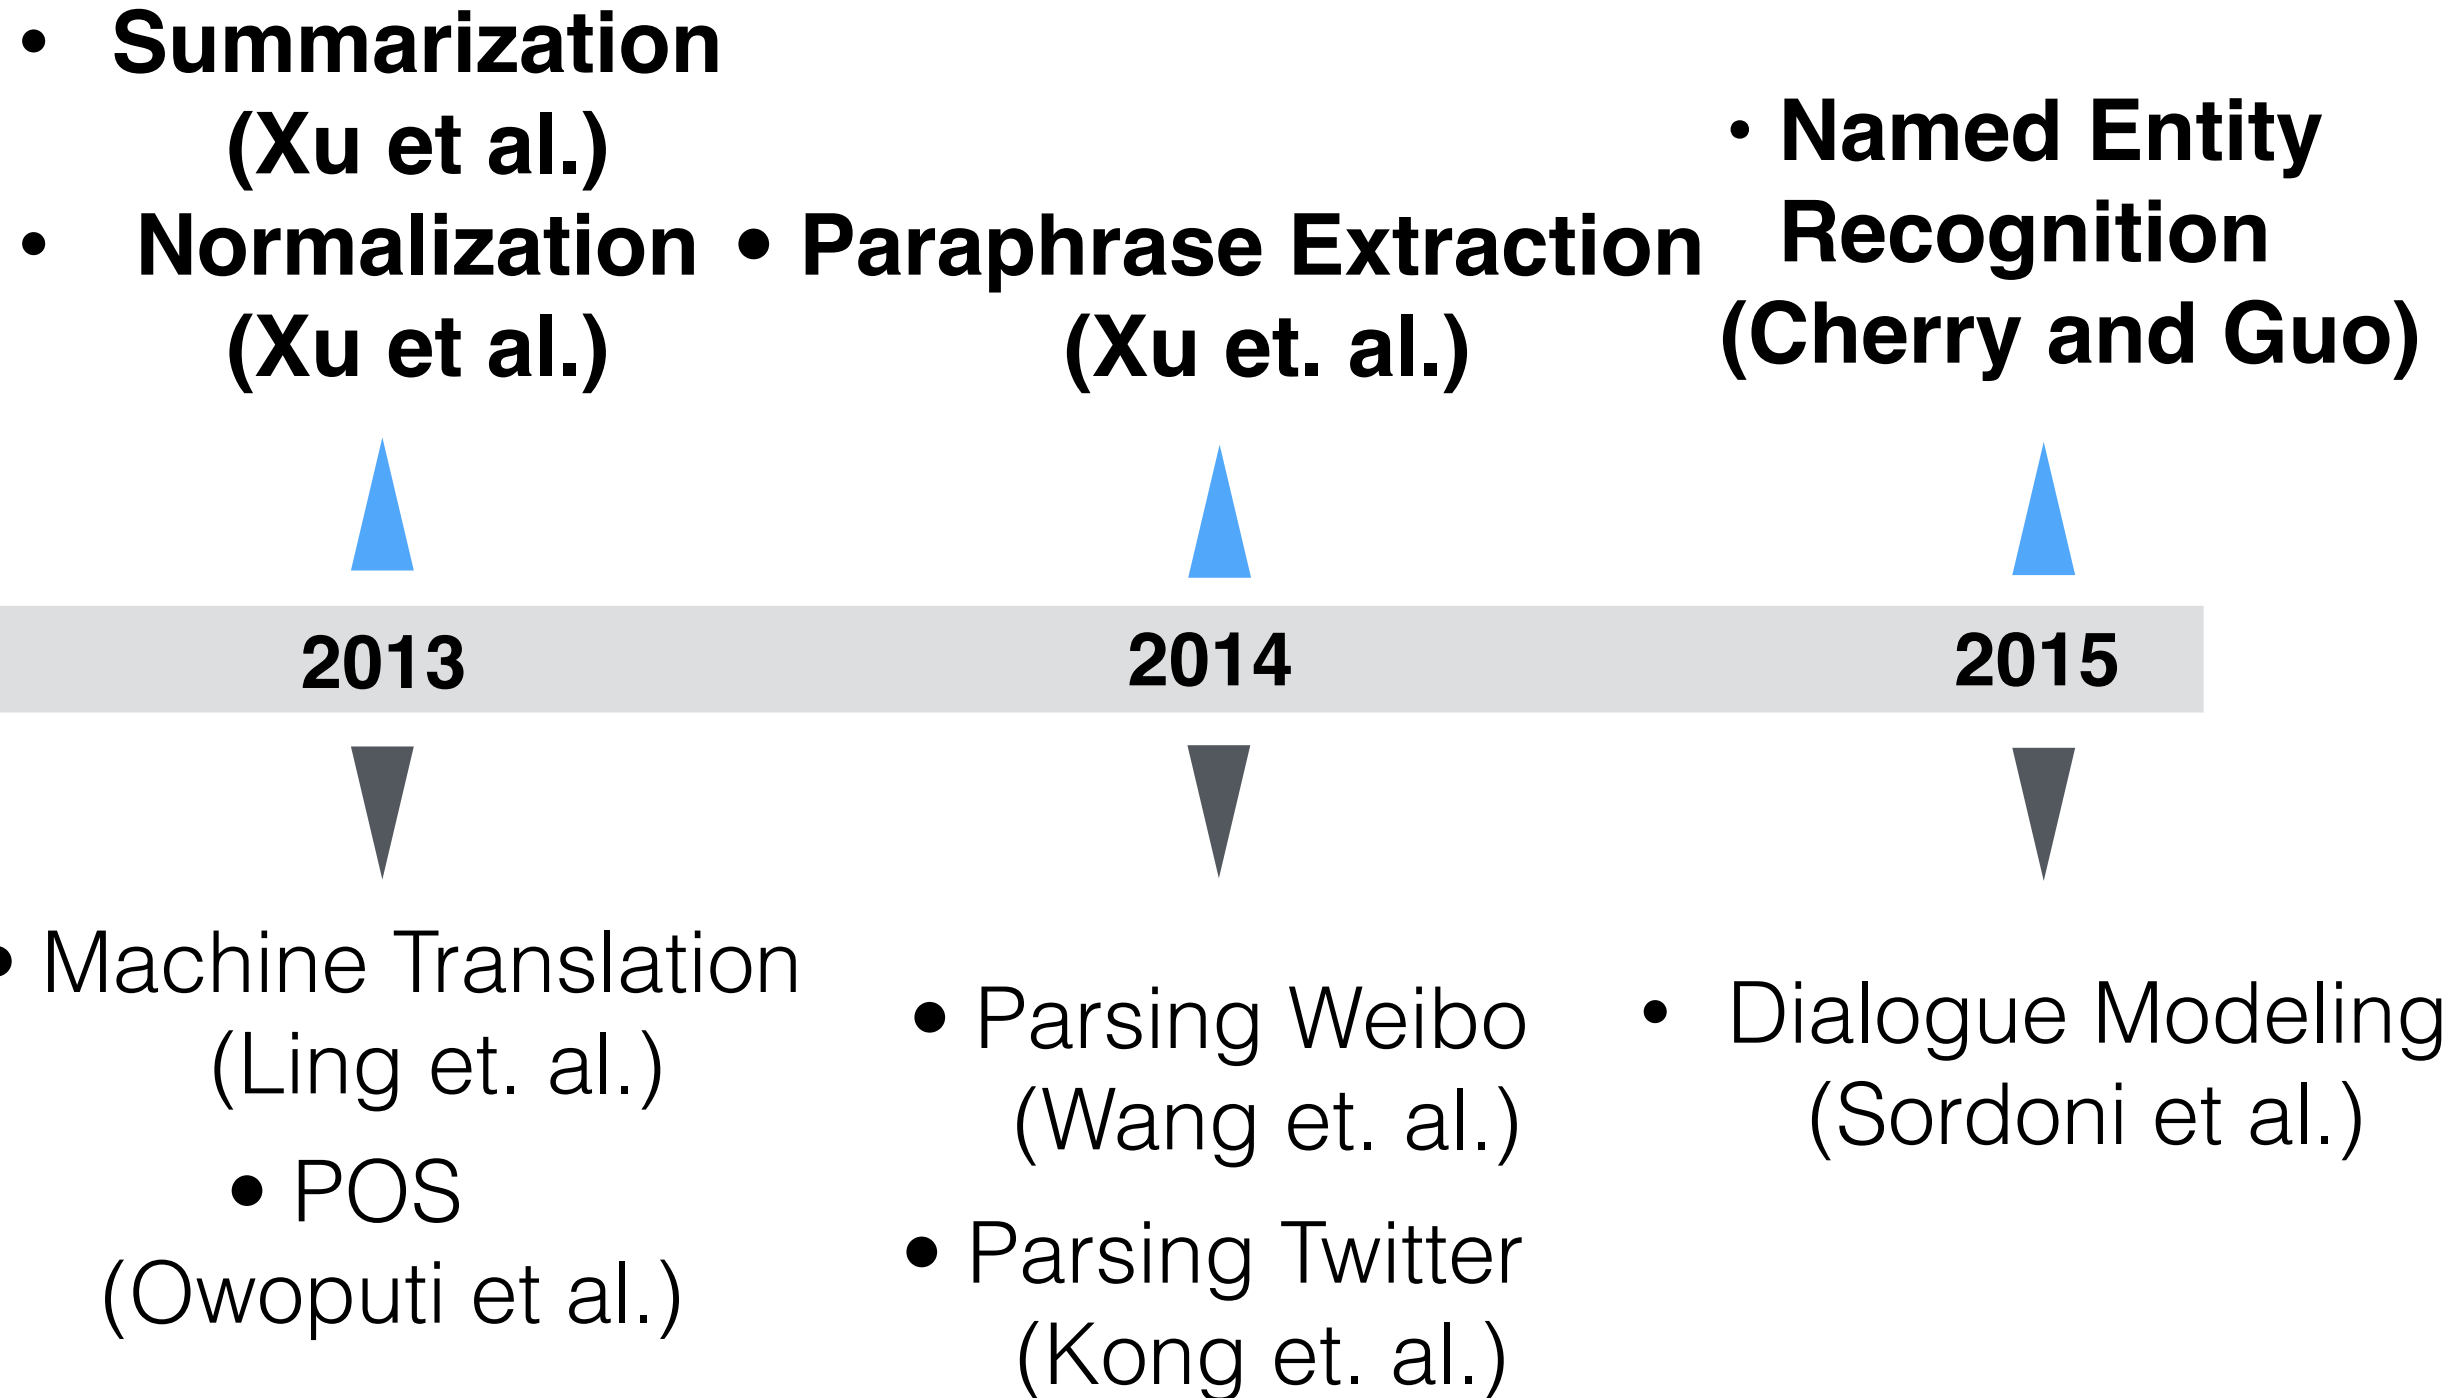




# ***BAD LANGUAGE!***

## ***...on the INTERNET!!***



Jacob **EISENSTEIN**  
**GEORGIA** Institute of **TECH**nology

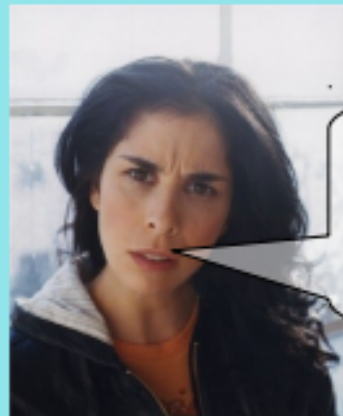

Boom! Ya ur  
website suxx bro

...dats why pluto is pluto  
it can neva be a star



michelle obama great.  
job. and. whit all my.  
respect she. look. great.  
congrats. to. her.



I now h v an iphone

*What can we do about it?*  
*Why don't they just write **NORMALLY??***  
*Can our software ever **ADAPT???***



# How does language go bad?

## Illiteracy? No.

(Tagliamonte and Denis 2008;  
Drouin and Davis 2009)




rob delaney @robdelaney

1 Jun

Great. Now a bunch of illiterate teens claim to be "powning" me with their insults. Heads up jerks my wife & children love me & are proud of

Expand Reply Classic RT Retweet Favorite More

## Length limits? (probably not)

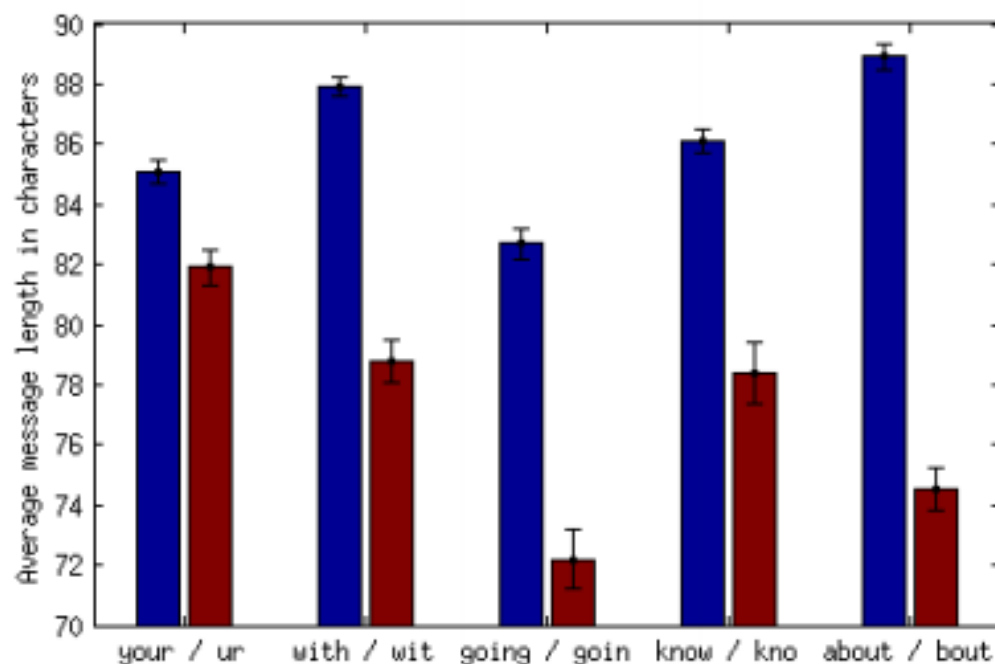


## Hardware input constraints? (Gouws et al 2011)



## Social variables

- Non-standard language does *identity work*, signaling authenticity, solidarity, etc.
- Social variation is usually inhibited in written language, but social media is less regulated than other written genres.

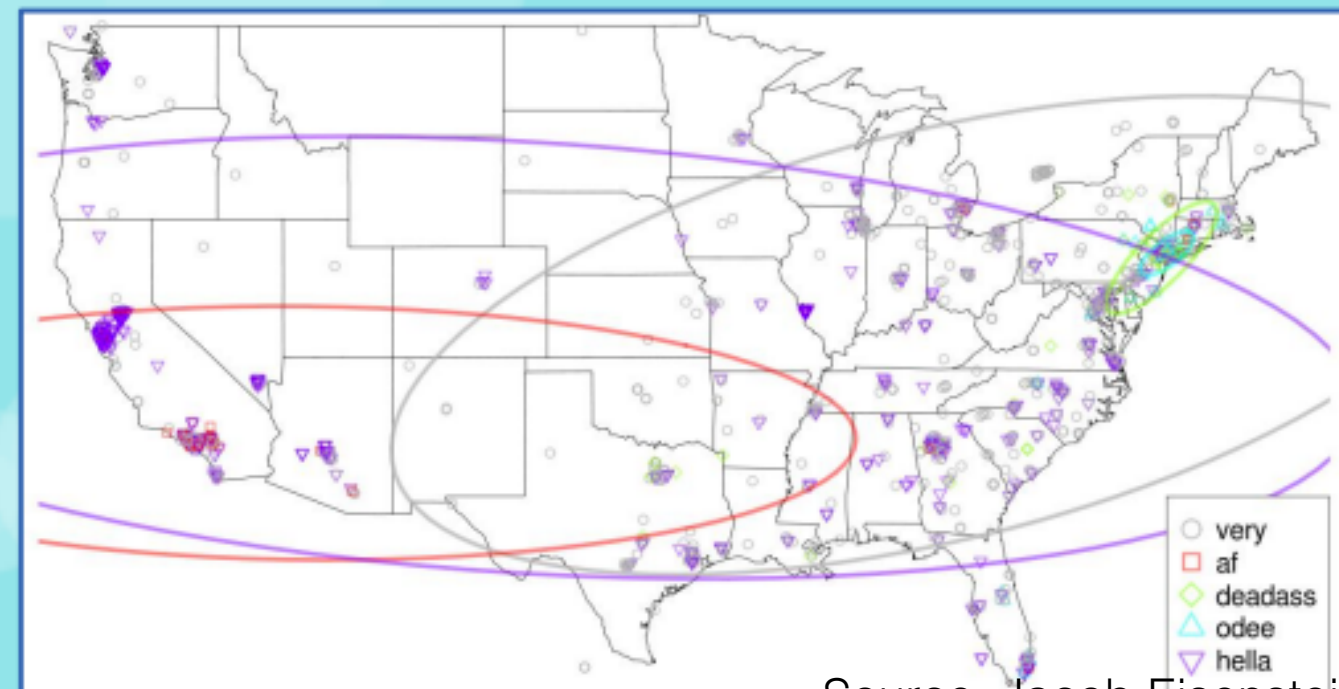

Source: Jacob Eisenstein

# Why is Social Media Text “Bad”?

- Lack of literacy? **no** [Drouin and Davis, 2009]
- Length restrictions? **not primarily** [Eisenstein, 2013]
- Text input method? **to some degree, yes** [Gouws et al., 2011]
- Pragmatics (mimicking prosodic effects etc. in speech)? **yeeeees** [Eisenstein, 2013]
- Social variables/markers of social identity? **blood oath!** [Eisenstein, 2013]

# Why is Social Media Text “Bad”?

- Pragmatics (mimicking prosodic effects etc. in speech)? **yeeees** [Eisenstein, 2013]

**HELLA** 🔊

Derived from "hell of a lot". Similar to "very, really, a lot," etc.

Used mostly in Northern California though has been heard in other parts of CA and even in the media such as an infamous "hella" South Park episode. (Cartman used it outside of its meaning to annoy Kyle.)

*Before: There's a hell of a lot of beer in that fridge.*

*After: There's hella beer in that fridge.*

*As "very" or "really":*

*"That's hella far away!"*

# Why is Social Media Text “Bad”?

- Social variables/markers of social identity? **blood oath!**  
[Eisenstein, 2013]



“I would like to believe he’s **sick** rather than just mean and evil.”



“You could’ve been getting down to this **sick** beat.”



# Text Normalization

- convert non-standard words to standard

Original tweet

@USER, r u cuming 2 MidCorner dis Sunday?

Normalized tweet

@USER, are you coming to MidCorner this Sunday?

Original tweet

Still have to get up early 2mr thou 😞 so Gn 😴

Normalized tweet

Still have to get up early tomorrow though 😞 so Good night 😴

Source: Tim Baldwin, Marie de Marneffe, Han Bo, Young-Bum Kim, Alan Ritter, Wei Xu  
Shared Tasks of the 2015 Workshop on Noisy User-generated Text:  
Twitter Lexical Normalization and Named Entity Recognition

An Unsupervised Learning Method:

# (1) Brown Clustering

- Input:
  - a (large) text corpus
- Output:
  1. a partition of words into word clusters
  2. or a hierarchical word clustering (generalization of 1)



# Brown Clustering

- Example Clusters (from Brown et al. 1992)


---

Friday Monday Thursday Wednesday Tuesday Saturday Sunday weekends Sundays Saturdays  
June March July April January December October November September August  
people guys folks fellows CEOs chaps doubters commies unfortunates blokes  
down backwards ashore sideways southward northward overboard aloft downwards adrift  
water gas coal liquid acid sand carbon steam shale iron  
great big vast sudden mere sheer gigantic lifelong scant colossal  
man woman boy girl lawyer doctor guy farmer teacher citizen  
American Indian European Japanese German African Catholic Israeli Italian Arab  
pressure temperature permeability density porosity stress velocity viscosity gravity tension  
mother wife father son husband brother daughter sister boss uncle  
machine device controller processor CPU printer spindle subsystem compiler plotter  
John George James Bob Robert Paul William Jim David Mike  
anyone someone anybody somebody

Source: Miller, Guinness, Zamanian (NAACL 2004)  
Name Tagging with Word Clusters and Discriminative Training

# Hierarchical Word Clustering

- Each intermediate node is a cluster:

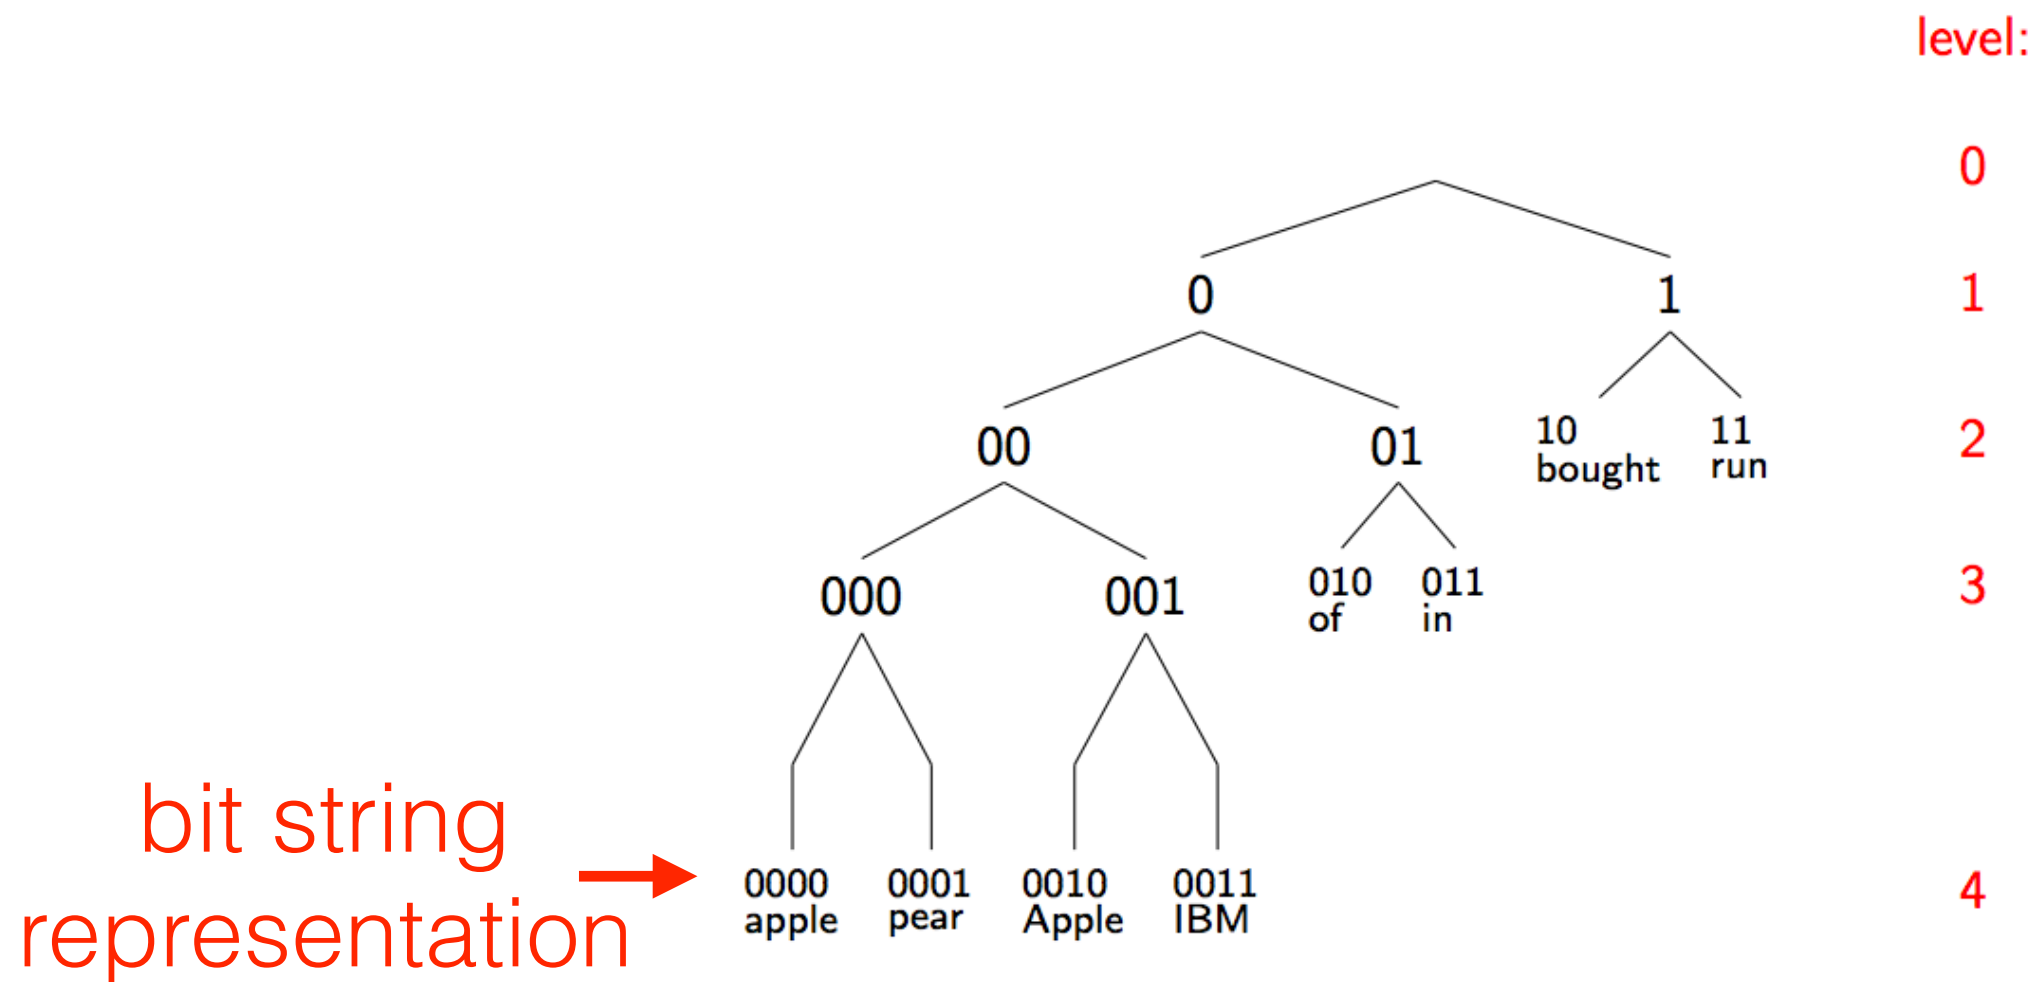

# Hierarchical Word Clustering

mailman	10000011010111
salesman	100000110110000
bookkeeper	1000001101100010
troubleshooter	10000011011000110
bouncer	10000011011000111
technician	1000001101100100
janitor	1000001101100101
saleswoman	1000001101100110
...	
Nike	1011011100100101011100
Maytag	10110111001001010111010
Generali	10110111001001010111011
Gap	1011011100100101011110
Harley-Davidson	10110111001001010111110
Enfield	101101110010010101111110
genus	101101110010010101111111
Microsoft	10110111001001011000
Ventritex	101101110010010110010
Tractebel	1011011100100101100110
Synopsys	1011011100100101100111
WordPerfect	1011011100100101101000
....	
John	101110010000000000
Consuelo	101110010000000001
Jeffrey	101110010000000010
Kenneth	10111001000000001100
Phillip	101110010000000011010
WILLIAM	101110010000000011011
Timothy	10111001000000001110

- Example Clusters  
(from Miller et al. 2004)

# Hierarchical Word Clustering

mailman	10000011010111
salesman	100000110110000
bookkeeper	1000001101100010
troubleshooter	10000011011000110
bouncer	10000011011000111
technician	1000001101100100
janitor	1000001101100101
saleswoman	1000001101100110
...	
Nike	1011011100100101011100
Maytag	10110111001001010111010
Generali	10110111001001010111011
Gap	1011011100100101011110
Harley-Davidson	10110111001001010111110
Enfield	101101110010010101111110
genus	101101110010010101111111
Microsoft	10110111001001011000
Ventritex	101101110010010110010
Tractebel	1011011100100101100110
Synopsys	1011011100100101100111
WordPerfect	1011011100100101101000
....	
John	101110010000000000
Consuelo	101110010000000001
Jeffrey	101110010000000010
Kenneth	10111001000000001100
Phillip	101110010000000011010
WILLIAM	101110010000000011011
Timothy	10111001000000001110

- Example Clusters  
(from Miller et al. 2004)

**word cluster features**  
(bit string prefix)

# Challenges in Twitter

2m 2ma 2mar 2mara 2maro 2marrow 2mor 2mora  
2moro 2morow 2morr 2morro 2morrow 2moz 2mr  
2mro 2mrrw 2mrw 2mw tmmrw tmo tmoro tmorrow  
tmoz tmr tmro tmrow tmrrow tmrrw tmrw tmrww tmw  
tomaro tomarow tomarro tomarrow tomm  
tommarow tommarrow tommoro tommorow  
tomorrow tommorw tommrow tomo tomolo tomoro  
tomorow tomorro tomorrw tomoz tomrw tomz



# Clusters in Twitter NER

System	Fin10Dev	Rit11	Fro14	Avg
CoNLL	27.3	27.1	29.5	28.0
+ Brown	38.4	39.4	42.5	40.1
+ Vector	40.8	40.4	42.9	41.4
+ Reps	42.4	42.2	46.2	43.6
Fin10	36.7	29.0	30.4	32.0
+ Brown	59.9	53.9	56.3	56.7
+ Vector	61.5	56.4	58.4	58.8
+ Reps	64.0	58.5	60.2	60.9
CoNLL+Fin10	44.7	39.9	44.2	42.9
+ Brown	54.9	52.9	58.5	55.4
+ Vector	58.9	55.2	59.9	58.0
+ Reps	58.9	56.4	61.8	59.0
+ Weights	64.4	59.6	63.3	62.4

Table 5: Impact of our components on Twitter NER performance, as measured by F1, under 3 data scenarios.

Source: Colin Cherry, Hongyu Guo (NAACL 2015)

The Unreasonable Effectiveness of Word Representations for Twitter Named Entity Recognition



# Clusters in Twitter NER

Brown clusters, for each  $i$  s.t.  $s \leq i < t$ :

$$\begin{aligned} & \{[y_j, brn(n, x_i), n]\}_{n \in \{2,4,8,12\}}, \\ & \{[y_j, er_{s,t}(i), brn(n, x_i), n]\}_{n \in \{2,4,8,12\}} \end{aligned}$$

Word vectors, for each  $i$  s.t.  $s \leq i < t$ :

$$\begin{aligned} & \{[y_j, n] = w2v(n, x_i)\}_{n=1}^{300}, \\ & \{[y_j, er_{s,t}(i), n] = w2v(n, x_i)\}_{n=1}^{300} \end{aligned}$$

Table 2: Word representation features in  $\phi(s, t, y_j, x)$ .  $brn(n, x_i)$  maps a word  $x_i$  to the first  $n$  bits of its Brown cluster bit sequence.  $w2v(n, x_i)$  maps  $x_i$  to the  $n^{th}$  component of its word vector, and  $[str] = v$  stands for a real-valued feature with name  $str$  and value  $v$ .

Source: Colin Cherry, Hongyu Guo (NAACL 2015)

The Unreasonable Effectiveness of Word Representations for Twitter Named Entity Recognition

# Brown Clustering

- The Intuition:
  - similar words appear in similar contexts
  - more precisely: similar words have similar distributions of words to their immediate left and right



# Brown Clustering Algorithm


- An agglomerative clustering algorithm:
  - take the top  $m$  most frequent words, put each into its own cluster,  $\mathbf{c}_1, \mathbf{c}_2, \dots, \mathbf{c}_m$
  - repeat for  $i = (m+1) \dots |V|$ 
    - create a new cluster  $\mathbf{c}_{m+1}$  for the  $i$ 'th most frequent word
    - choose two clusters from  $\mathbf{c}_1, \mathbf{c}_2, \dots, \mathbf{c}_{m+1}$  to be merged, which give the highest **Quality** based on a training corpus

# Brown Clustering Algorithm

- maximize the **Quality** function that score a given partitioning **C** :

$$\begin{aligned} \text{Quality}(C) &= \sum_i^n \log e(w_i | C(w_i)) q(C(w_i) | C(w_{i-1})) \\ &= \sum_{c=1}^k \sum_{c'=1}^k p(c, c') \log \frac{p(c, c')}{p(c)p(c')} + G \end{aligned}$$

parameters



- **$n(c)$**  : count of class **c** seen in the corpus
- **$n(c, c')$**  : counts of **c'** seen following **c**

$$p(c, c') = \frac{n(c, c')}{\sum_{c, c'} n(c, c')}$$

$$p(c) = \frac{n(c)}{\sum_c n(c)}$$

# Brown Clustering

[percyliang / brown-cluster](#)

Watch 29Star 203Fork 79

[Code](#)[Issues 9](#)[Pull requests 0](#)[Projects 0](#)[Wiki](#)[Pulse](#)[Graphs](#)

C++ implementation of the Brown word clustering algorithm.

20 commits1 branch0 releases4 contributors

Branch: masterNew pull requestCreate new fileUpload filesFind fileClone or download

percyliang Merge pull request #15 from mannby/large\_corporaLatest commit d9dff3b on Mar 26

basic	Enable $\geq 2^{31}$ tokens in input data	8 months ago
cluster-viewer	cluster viewer final	3 years ago
.gitignore	turn on -O3 optimization, add gitignore	3 years ago
Makefile	small fix to makefile	3 years ago
README	Merge branch 'master' of https://github.com/percyliang/brown-cluster	3 years ago
input.txt	Version 1.2	4 years ago
output.txt	Version 1.3: incorporate Chris Dyer's g++ compatibility changes; smal...	4 years ago
wcluster.cc	Enable $\geq 2^{31}$ tokens in input data	8 months ago

README

Implementation of the Brown hierarchical word clustering algorithm.  
Percy Liang  
Release 1.3  
2012.07.24

Input: a sequence of words separated by whitespace (see input.txt for an example).  
Output: for each word type, its cluster (see output.txt for an example).  
In particular, each line is:  
<cluster represented as a bit string> <word> <number of times word occurs in input>

# Word Vector Representations

(a.k.a. “word embeddings”)

- 4 kinds of vector semantic models

**dense** •

1. Hard clustering (e.g. Brown clustering)
2. Soft clustering (e.g. SVD, LSA, LDA)
3. Neural Network inspired models  
(e.g. skip-grams and CBOW in word2vec)

**sparse** •


4. Mutual-information weighted word co-occurrence metrics



# Hard vs. Soft Clustering


## Hard clustering

Each observation belongs to exactly one cluster

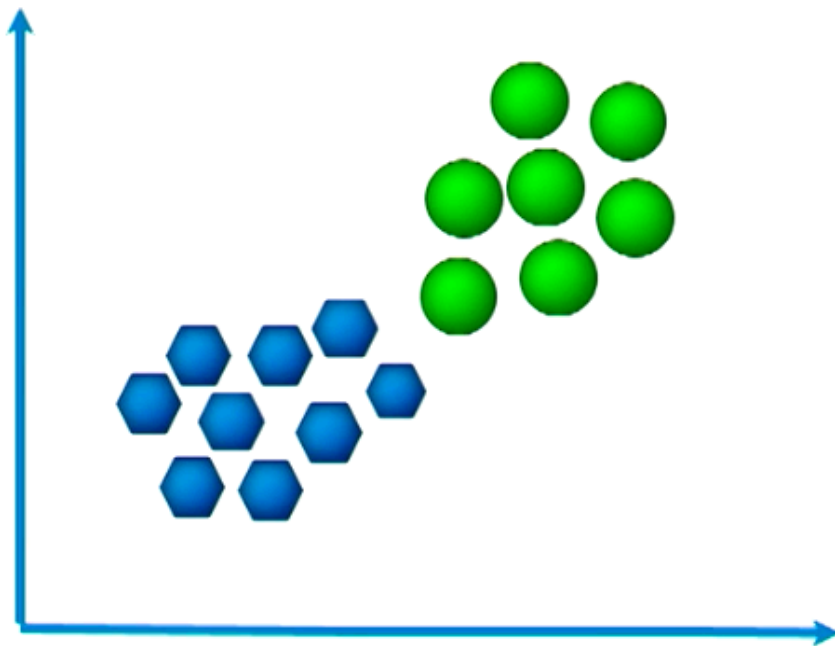

## Soft clustering

An observation can belong to more than one cluster to a certain degree (e.g. likelihood of belonging to the cluster)

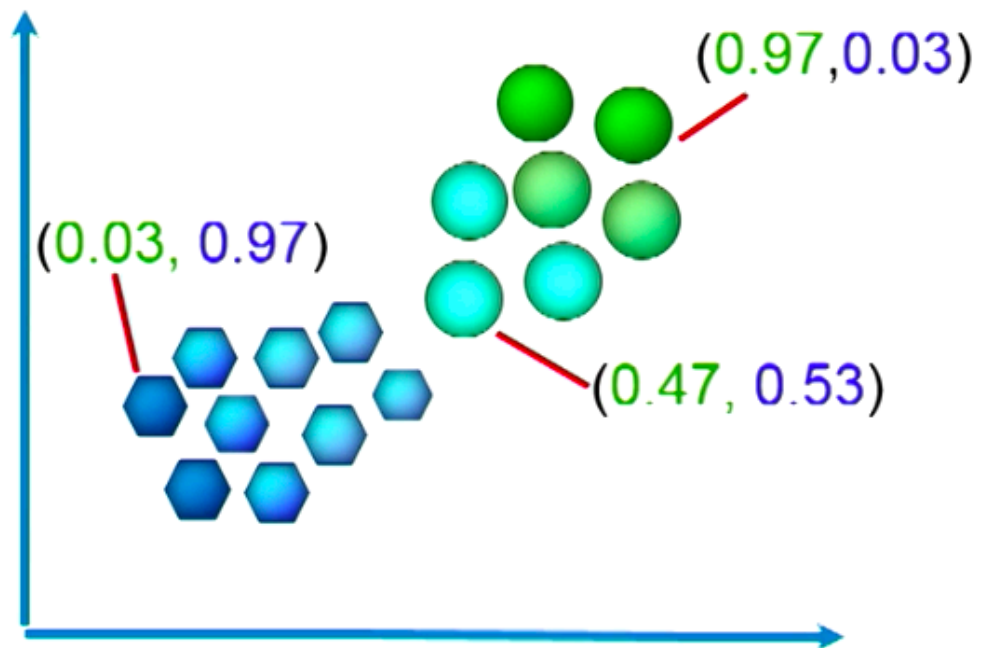

# In Contrast To

represent word meaning by a taxonomy like WordNet

```
from nltk.corpus import wordnet as wn
panda = wn.synset('panda.n.01')
hyper = lambda s: s.hypernyms()
list(panda.closure(hyper))
```

```
[Synset('procyonid.n.01'),
Synset('carnivore.n.01'),
Synset('placental.n.01'),
Synset('mammal.n.01'),
Synset('vertebrate.n.01'),
Synset('chordate.n.01'),
Synset('animal.n.01'),
Synset('organism.n.01'),
Synset('living_thing.n.01'),
Synset('whole.n.02'),
Synset('object.n.01'),
Synset('physical_entity.n.01'),
Synset('entity.n.01')]
```

synonym sets (good):

```
S: (adj) full, good
S: (adj) estimable, good, honorable, respectable
S: (adj) beneficial, good
S: (adj) good, just, upright
S: (adj) adept, expert, good, practiced,
proficient, skillful
S: (adj) dear, good, near
S: (adj) good, right, ripe
...
S: (adv) well, good
S: (adv) thoroughly, soundly, good
S: (n) good, goodness
S: (n) commodity, trade good, good
```

# In Contrast To

represent word meaning by a taxonomy like WordNet

- problems with this discrete representation:
  - missing new words (impossible to keep up-to-date):  
*wicked, badass, nifty, crack, ace, wizard, genius, ninja*
  - requires human labor to create and adapt
  - hard to compute accurate word similarity
  - and apparently not enough to handle social media data!

# Distributional Intuition

- From context words, human can guess a word's meaning:

A bottle of ***tesgüino*** is on the table

Everybody likes ***tesgüino***

***Tesgüino*** makes you drunk

We make ***tesgüino*** out of corn.

**“You shall know a word by the company it keeps”**  
— J. R. Firth 1957

# Distributional Intuition

- From context words, human can guess a word's meaning:

A bottle of ***tesgüino*** is on the table  
Everybody likes ***tesgüino***  
***Tesgüino*** makes you drunk  
We make ***tesgüino*** out of corn.

- similar words = similar contexts = similar vectors
- word meaning is represented by a vector of numbers

# Simple Co-occurrence Vectors

- Option #1: word-document co-occurrence counts

	As You Like It	Twelfth Night	Julius Caesar	Henry V
battle	1	1	8	15
soldier	2	2	12	36
fool	37	58	1	5
clown	6	117	0	0

this will give general topics (e.g. sports terms will have similar entries), leading to **Latent Semantic Analysis**



# Simple Co-occurrence Vectors

- Option #2: use a sliding window over a big corpus of text and count word co-occurrences:

example corpus:

- I like deep learning.
- I like NLP.
- I enjoy flying.

counts	I	like	enjoy	deep	learning	NLP	flying	.
I	0	2	1	0	0	0	0	0
like	2	0	0	1	0	1	0	0
enjoy	1	0	0	0	0	0	1	0
deep	0	1	0	0	1	0	0	0
learning	0	0	0	1	0	0	0	1
NLP	0	1	0	0	0	0	0	1
flying	0	0	1	0	0	0	0	1
.	0	0	0	0	1	1	1	0

this captures both syntactic (POS) and semantic information

# Simple Co-occurrence Vectors

- Problems with this representation of raw counts:
  - increase in size with vocabulary
  - high dimensionality and very sparse!
  - not a great measure of association between words:  
**“the” and “of” are very frequent, but maybe not the most discriminative**
  - unable to capture word order  
**“I like NLP” and “NLP like I” will have same representation**

# Lower Dimensional Vectors

- **The Idea:** use dense vectors to store “most” of the important information in a fixed, small number of dimensions
- usually around 25 ~ 1000 dimensions

# Lower Dimensional Vectors

- Word meaning is represented as a **dense** vector

$$\text{"linguistic"} = \begin{pmatrix} 0.286 \\ 0.792 \\ -0.177 \\ -0.107 \\ 0.109 \\ -0.542 \\ 0.349 \\ 0.271 \end{pmatrix}$$

How to reduce the dimensionality?

# (2) Matrix Factorization

- Singular Value Decomposition (SVD)

$$\begin{array}{ccccc}
 \begin{array}{c} m \\ \boxed{\phantom{X}} \\ n \\ X \end{array} & = & \begin{array}{c} r \\ \boxed{\begin{array}{c} | \quad | \quad | \quad \cdots \\ U_1 U_2 U_3 \cdots \\ | \quad | \quad | \end{array}} \\ n \\ U \end{array} & \begin{array}{c} r \\ \boxed{\begin{array}{c} s_1 \quad \quad \quad 0 \\ \quad s_2 \quad \quad \quad \cdot \\ \quad \quad s_3 \quad \cdot \quad \cdot \\ 0 \quad \quad \quad \cdot \quad \cdot \quad s_r \end{array}} \\ r \\ S \end{array} & \begin{array}{c} m \\ \boxed{\begin{array}{c} \text{---} V_1 \text{---} \\ \text{---} V_2 \text{---} \\ \text{---} V_3 \text{---} \\ \vdots \\ \vdots \end{array}} \\ r \\ V^T \end{array} \\
 \\
 \begin{array}{c} m \\ \boxed{\phantom{\hat{X}}} \\ n \\ \hat{X} \end{array} & = & \begin{array}{c} k \\ \boxed{\begin{array}{c} | \quad | \quad | \quad \cdots \\ U_1 U_2 U_3 \cdots \\ | \quad | \quad | \end{array}} \\ n \\ \hat{U} \end{array} & \begin{array}{c} k \\ \boxed{\begin{array}{c} s_1 \quad \quad \quad 0 \\ \quad s_2 \quad \quad \quad \cdot \\ \quad \quad s_3 \quad \cdot \quad \cdot \\ 0 \quad \quad \quad \cdot \quad \cdot \quad s_k \end{array}} \\ k \\ \hat{S} \end{array} & \begin{array}{c} m \\ \boxed{\begin{array}{c} \text{---} V_1 \text{---} \\ \text{---} V_2 \text{---} \\ \text{---} V_3 \text{---} \\ \vdots \\ \vdots \end{array}} \\ k \\ \hat{V}^T \end{array}
 \end{array}$$

$\hat{X}$  is the best rank  $k$  approximation to  $X$ , in terms of least squares.

# SVD Word Vectors

example corpus:

- I like deep learning.
- I like NLP.
- I enjoy flying.


```
import numpy as np
la = np.linalg
words = ["I", "like", "enjoy",
         "deep", "learnig", "NLP", "flying", "."]
X = np.array([[0, 2, 1, 0, 0, 0, 0, 0],
              [2, 0, 0, 1, 0, 1, 0, 0],
              [1, 0, 0, 0, 0, 0, 1, 0],
              [0, 1, 0, 0, 1, 0, 0, 0],
              [0, 0, 0, 1, 0, 0, 0, 1],
              [0, 1, 0, 0, 0, 0, 0, 1],
              [0, 0, 1, 0, 0, 0, 0, 1],
              [0, 0, 0, 0, 1, 1, 1, 0]])

U, s, Vh = la.svd(X, full_matrices=False)
```



# SVD Word Vectors

- plot first 2 columns of U corresponding to the 2 biggest singular values:

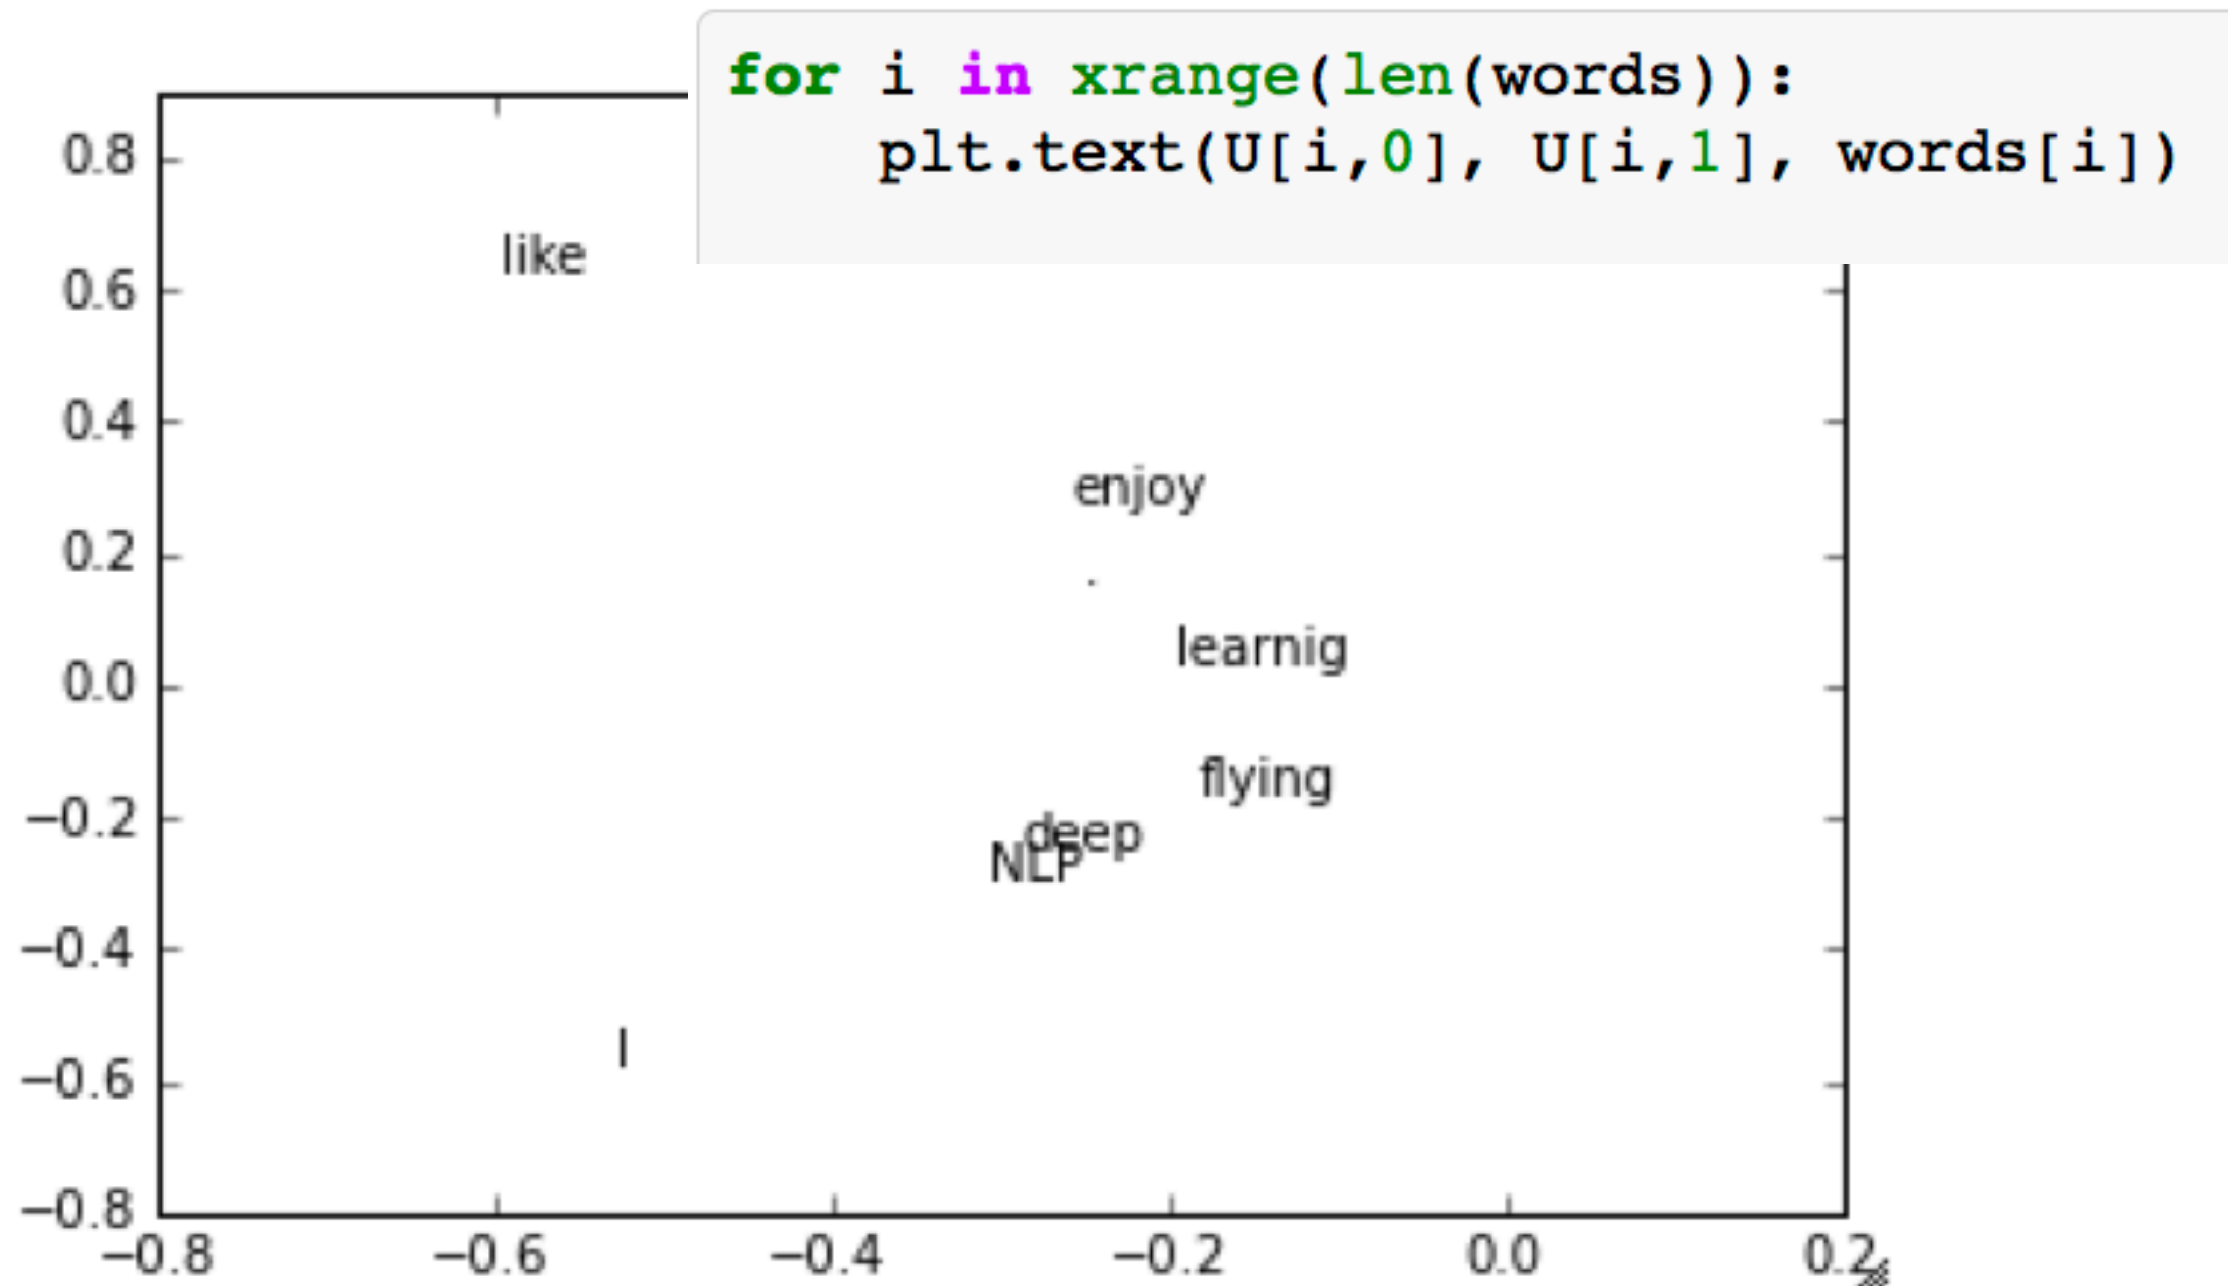


# Some Hacks

- Problem: function words (“the”, “he”, “has”) are too frequent → syntax has too much impact.
  - fixes: cap the counts, or ignore them all
- ramped windows that count closer words more
- etc ...


# Zipf's (Power) Law

- frequency of word is inversely proportional to its rank in the frequency table

word frequency in the Brown corpus

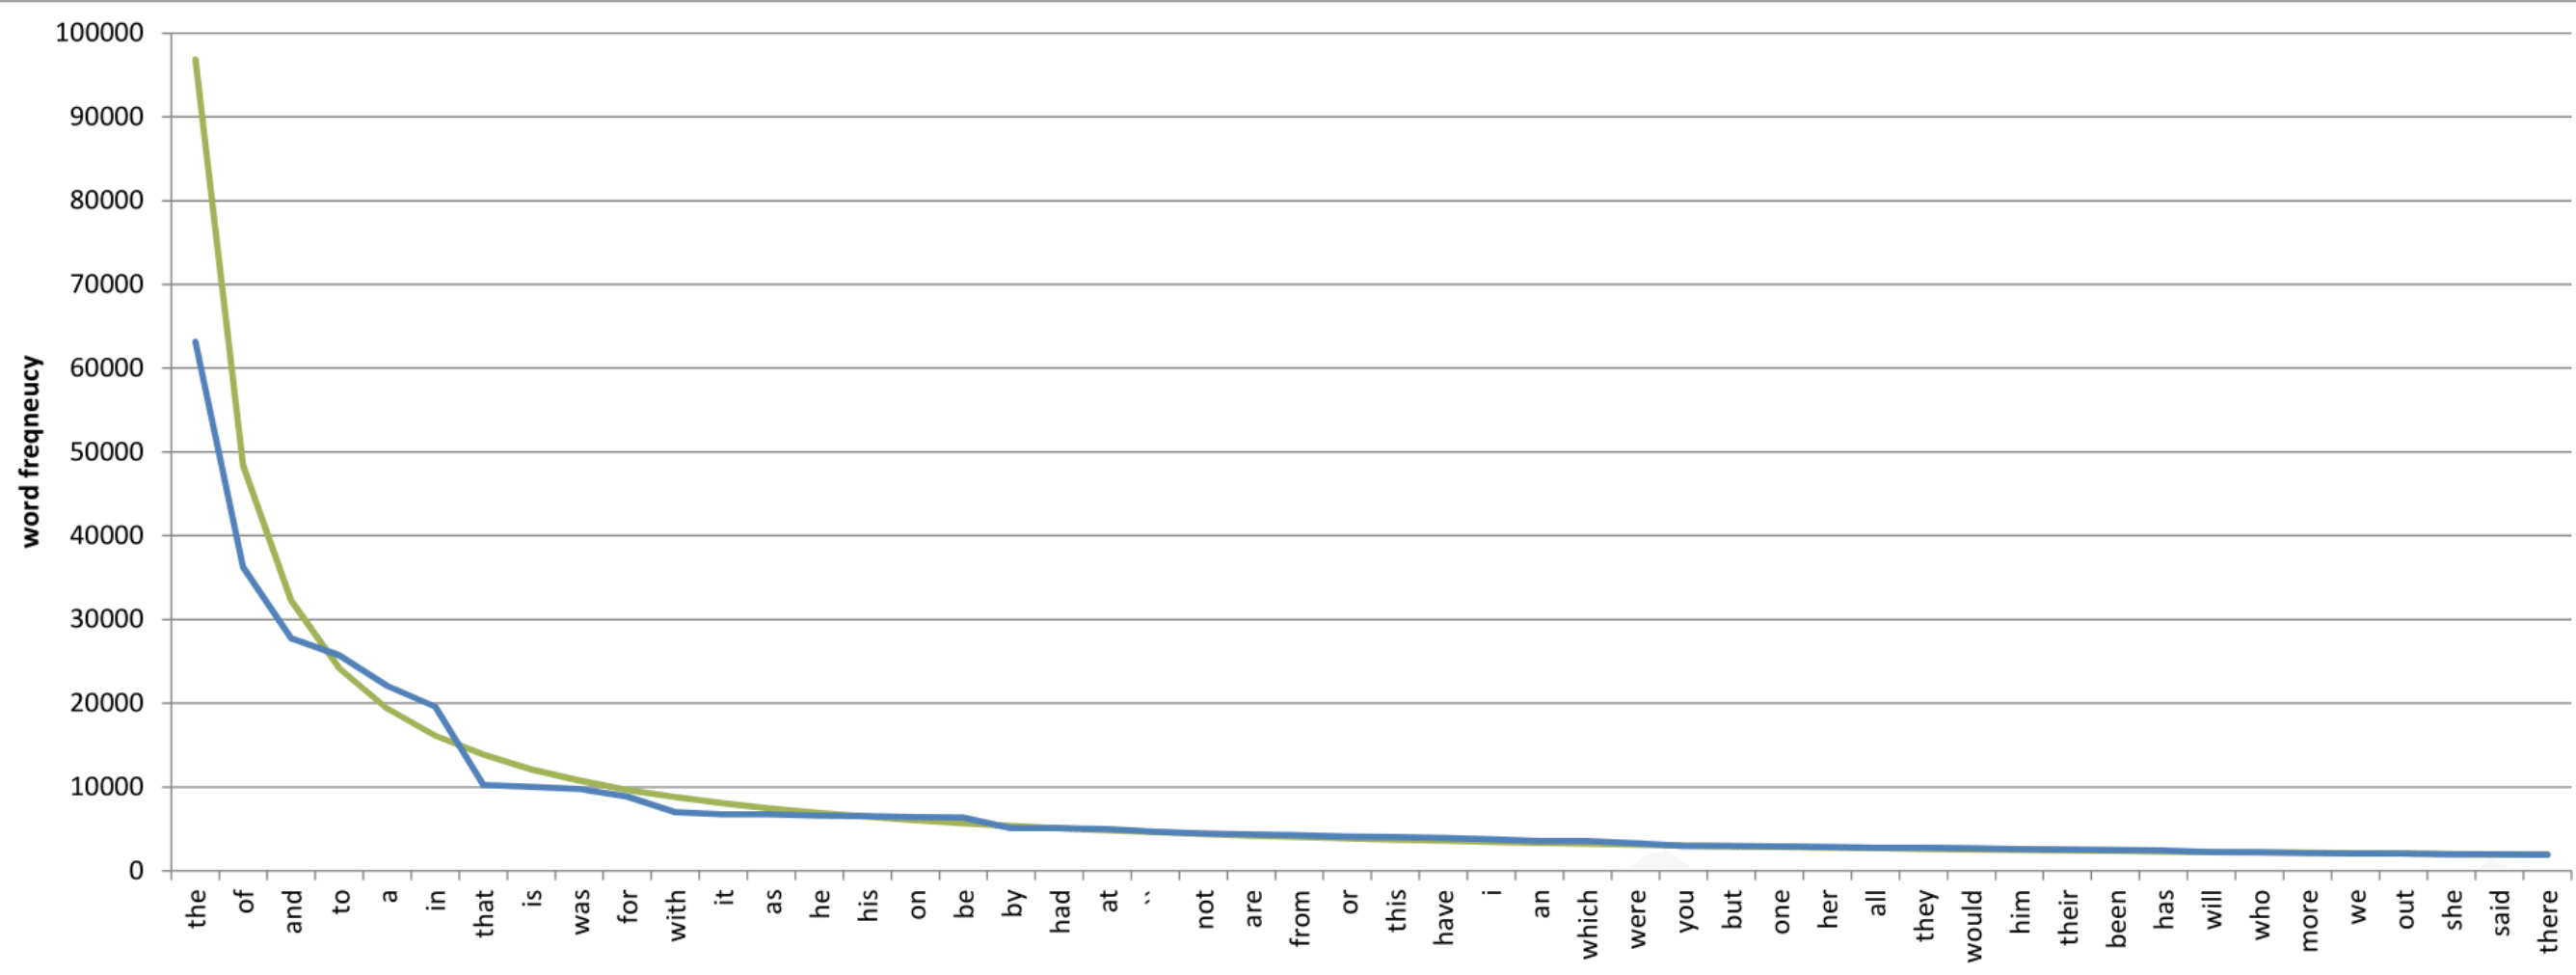


# Zipf's (Power) Law

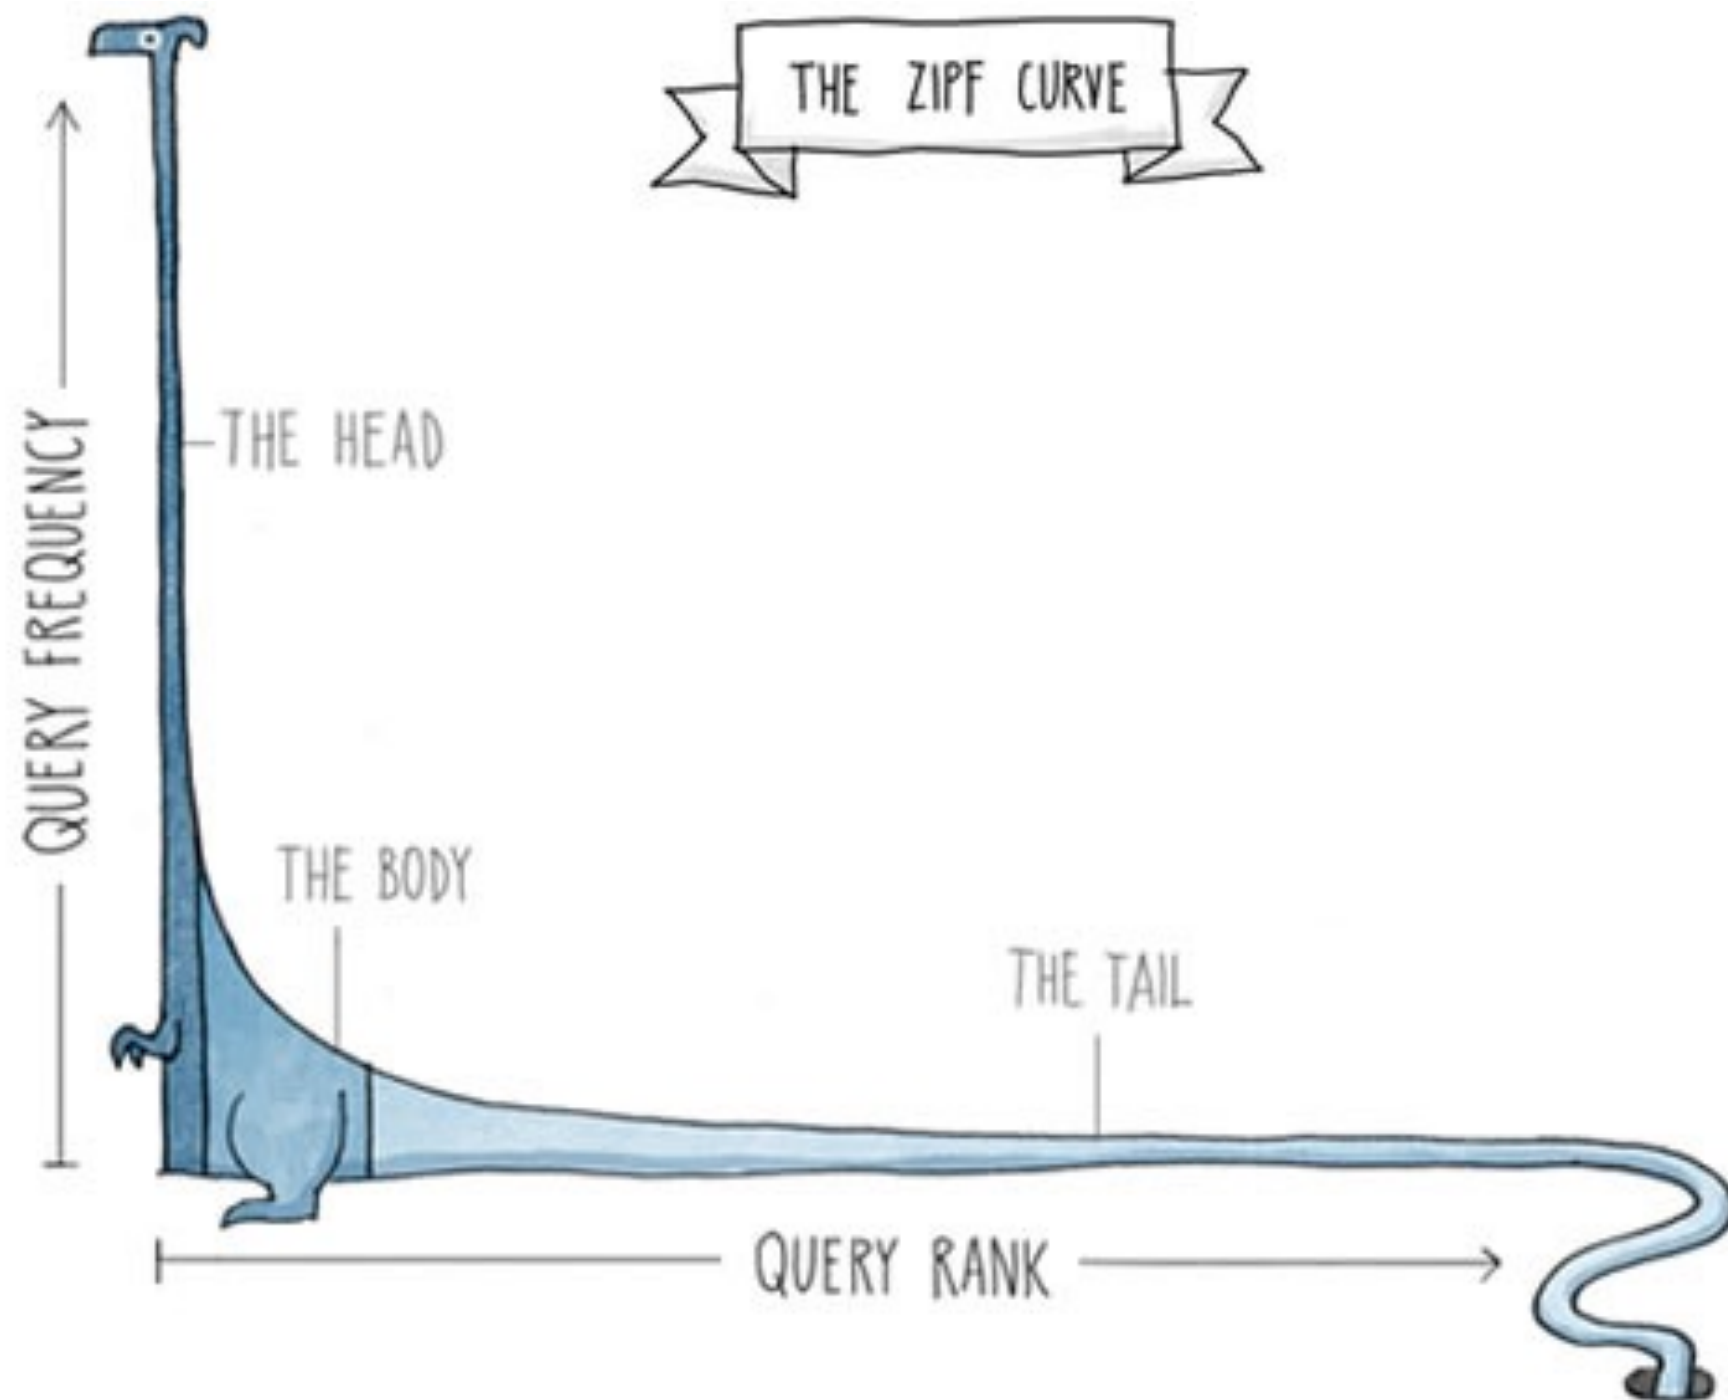

Source: smashing magazine

# Clustering Vectors


- visualize similarity

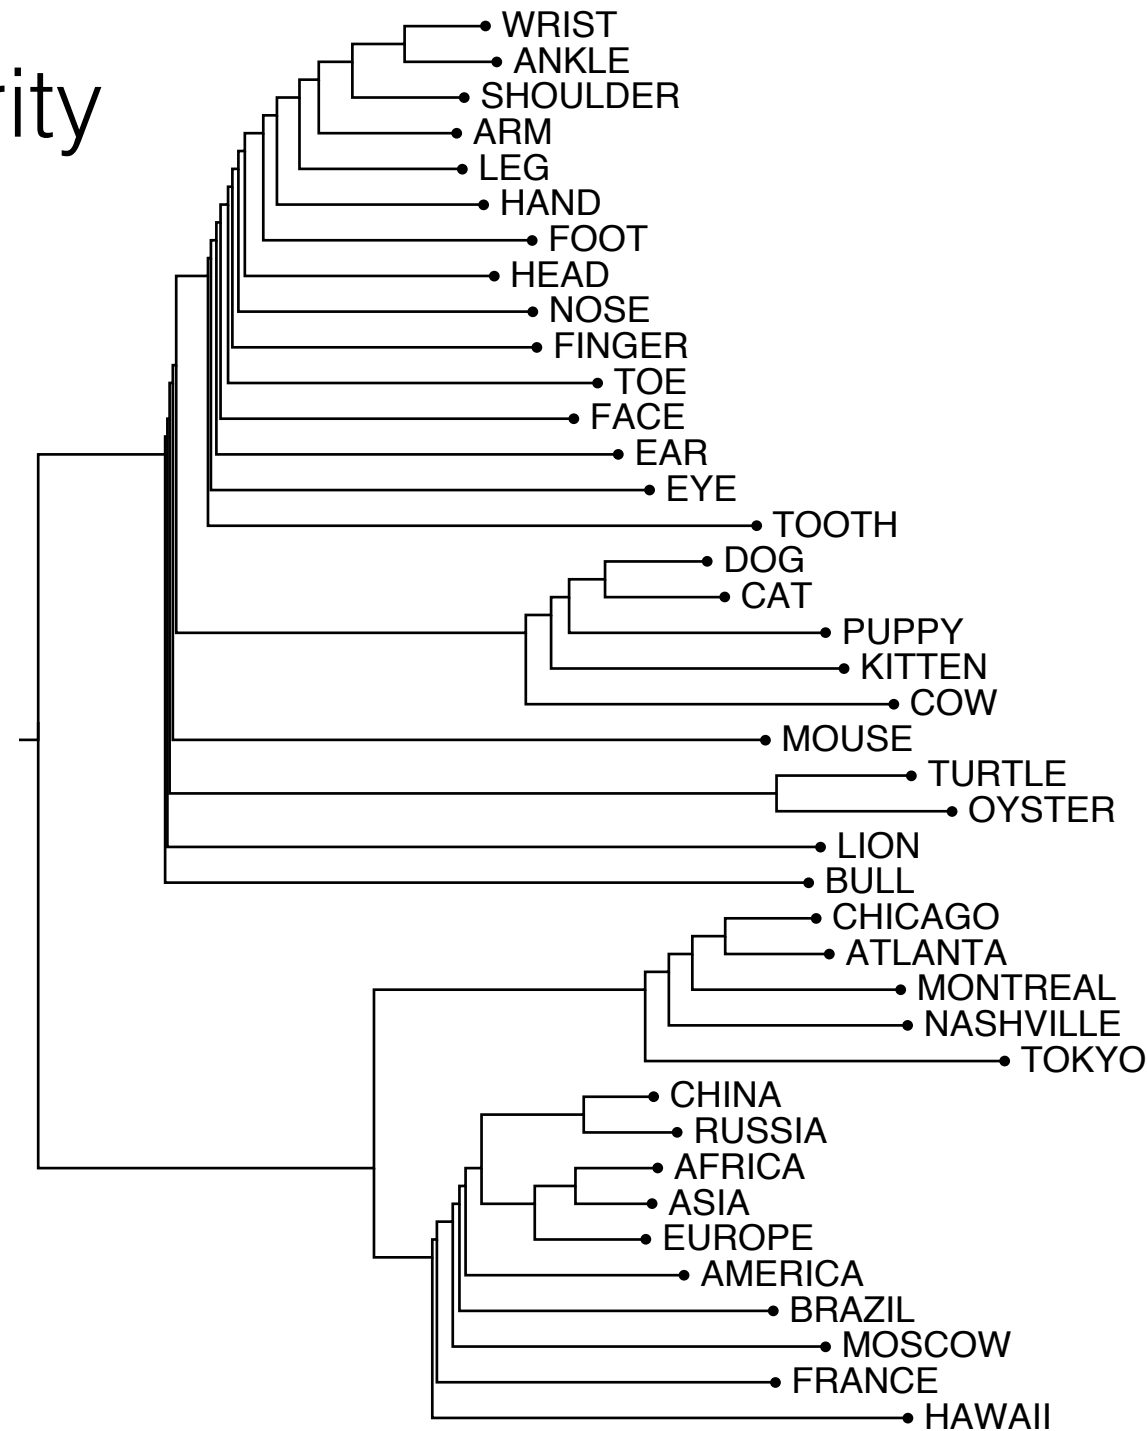

Source: Rohde et al. (2005)

An Improved Model of Semantic Similarity Based on Lexical Co-Occurrence

# Interesting Syntactic Patterns

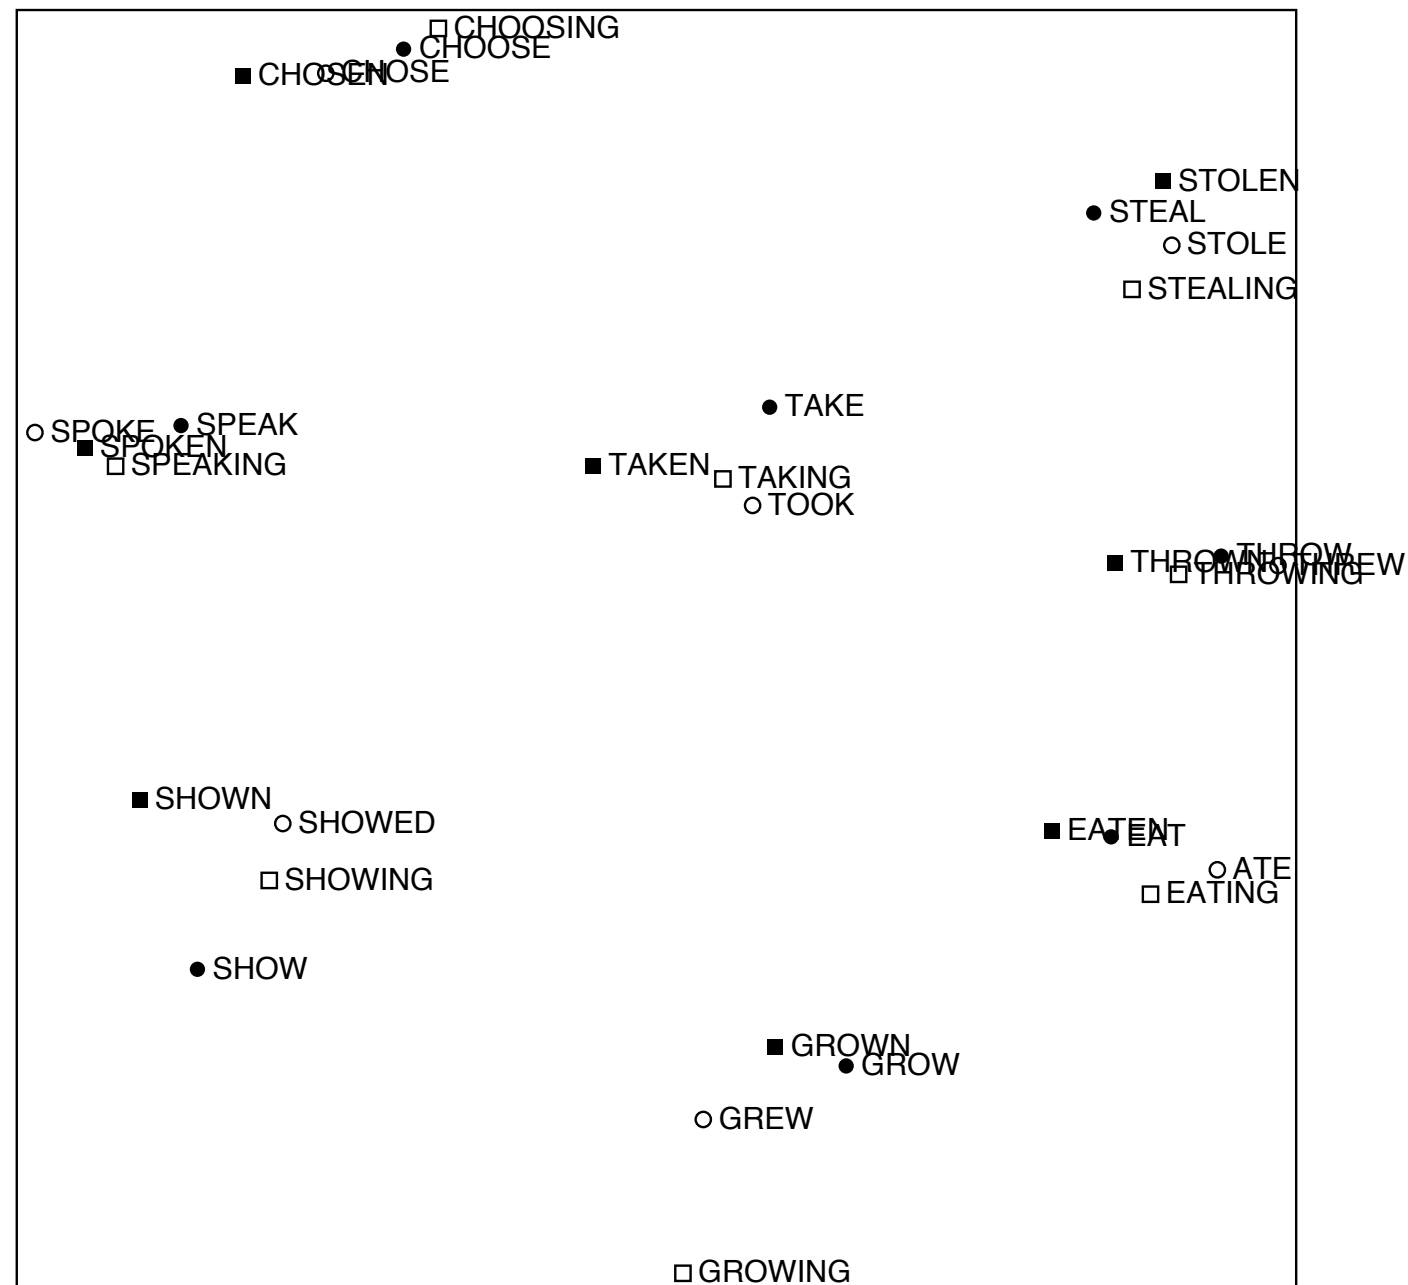


Source: Rohde et al. (2005)

An Improved Model of Semantic Similarity Based on Lexical Co-Occurrence



# Interesting Semantic Patterns

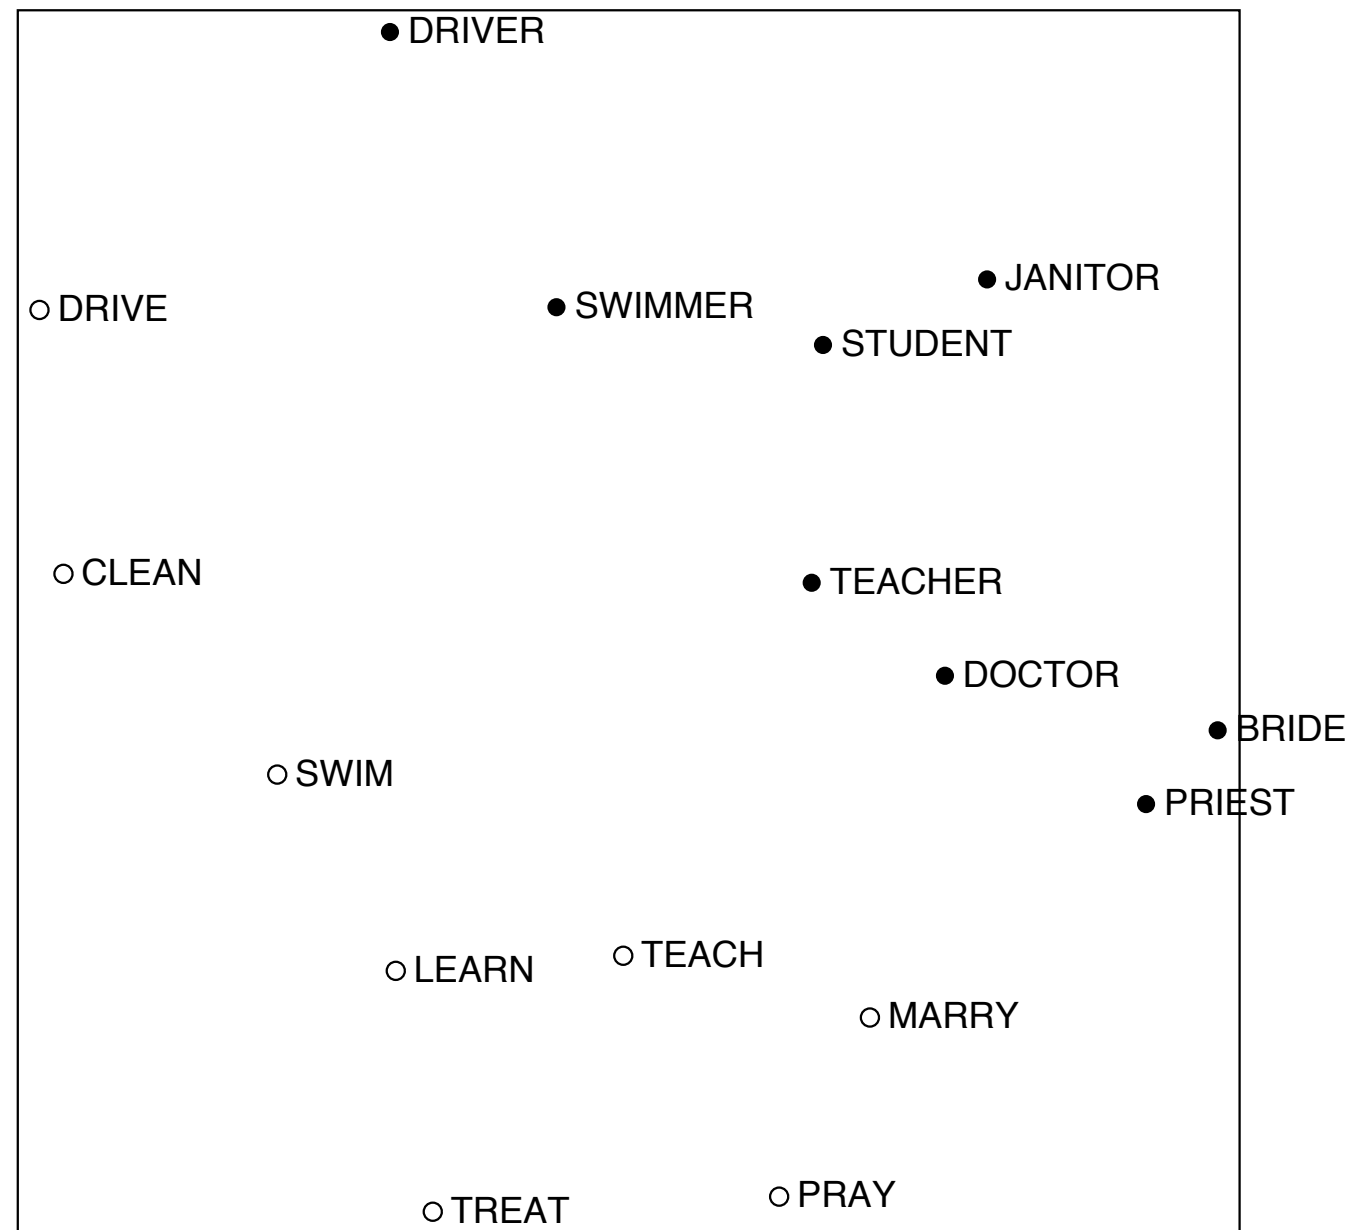

Source: Rohde et al. (2005)

An Improved Model of Semantic Similarity Based on Lexical Co-Occurrence

# SVD Word Vectors

- Still some problems:
  - computational cost scales quadratically for ***m*** x ***n*** matrix —  $O(\mathbf{mn}^2)$  when  $n < m$
  - hard to use large corpus (and vocabulary)
  - hard to incorporate new words or documents

# (3) Neural Word Embeddings

- **The Idea:** directly learn low-dimensional word vectors
- ... can go back to 1980s:
  - Learning Representations by Back-Propagating Errors (Rumelhart et al., 1986)
  - **A Neural Probabilistic Language Model** (Bengio et al., 2003)
  - NLP from Scratch (Collobert & Weston, 2008)
  - **Word2vec** (Mikolov et al. 2013)



# Neural Word Embeddings

- **The Basic Idea:**

- We define a model that aims to predict a word given its context words (word vectors), which has a loss function, e.g.  $J = 1 - P(\text{context} | w_t)$
- We look at many positions of  $t$  in a big text corpus,
- and keep adjusting the word vectors to minimize this loss.

# Word2vec


- simple and efficient

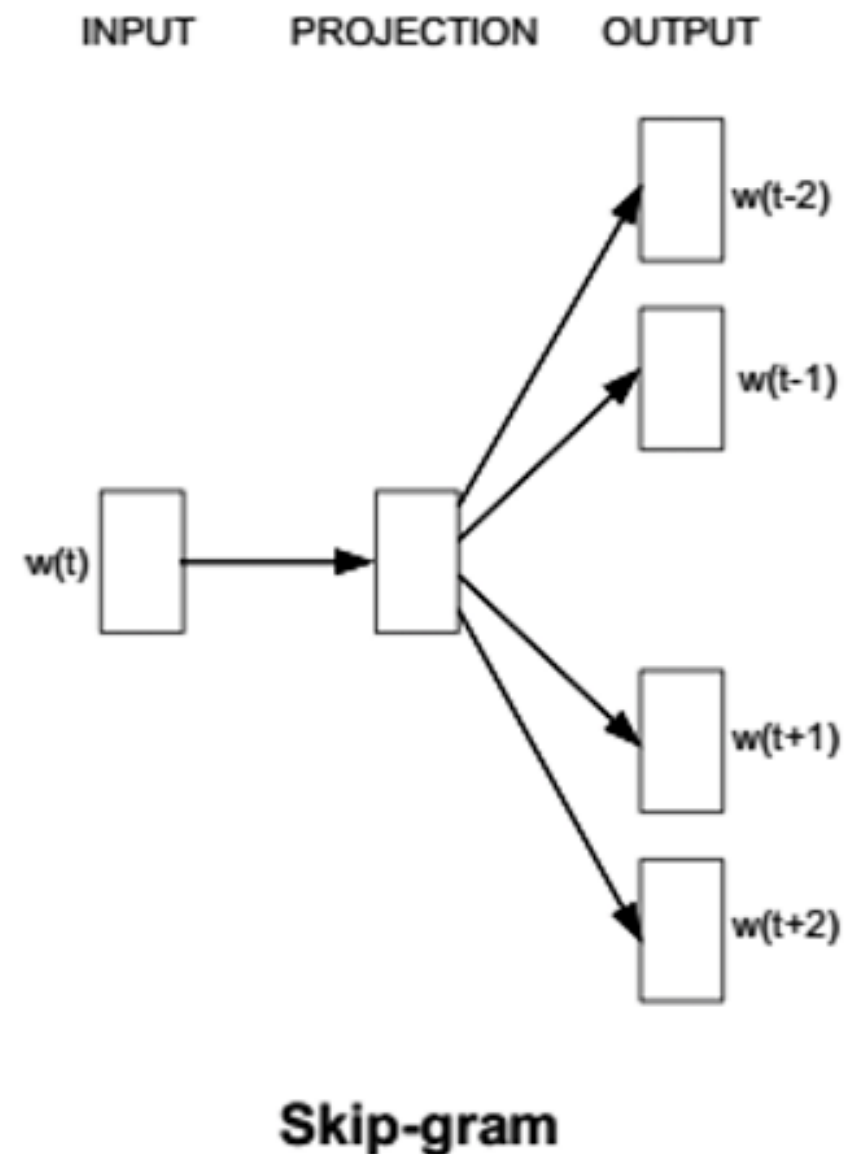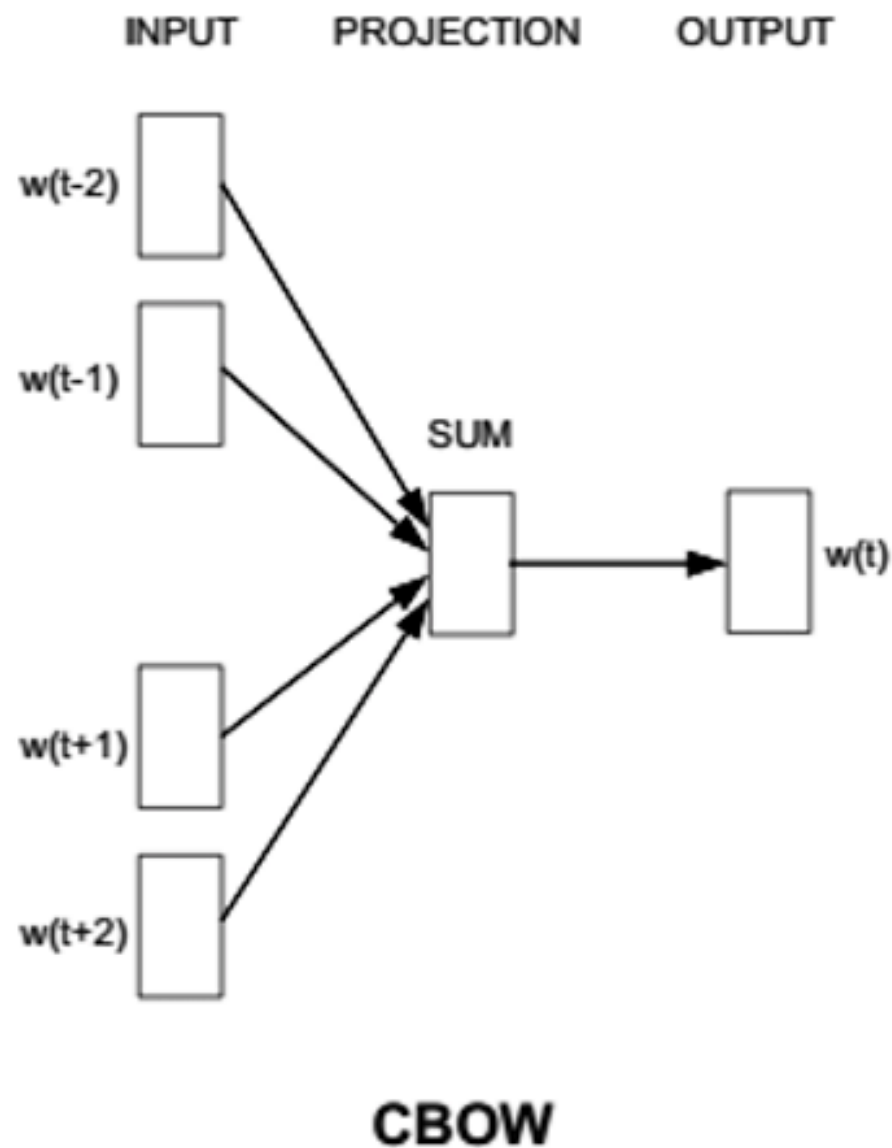

Source: Mikolov et al. (NIPS 2013)

# Word2vec

- Skip-gram — predicts surrounding “outside” words given the “center” word

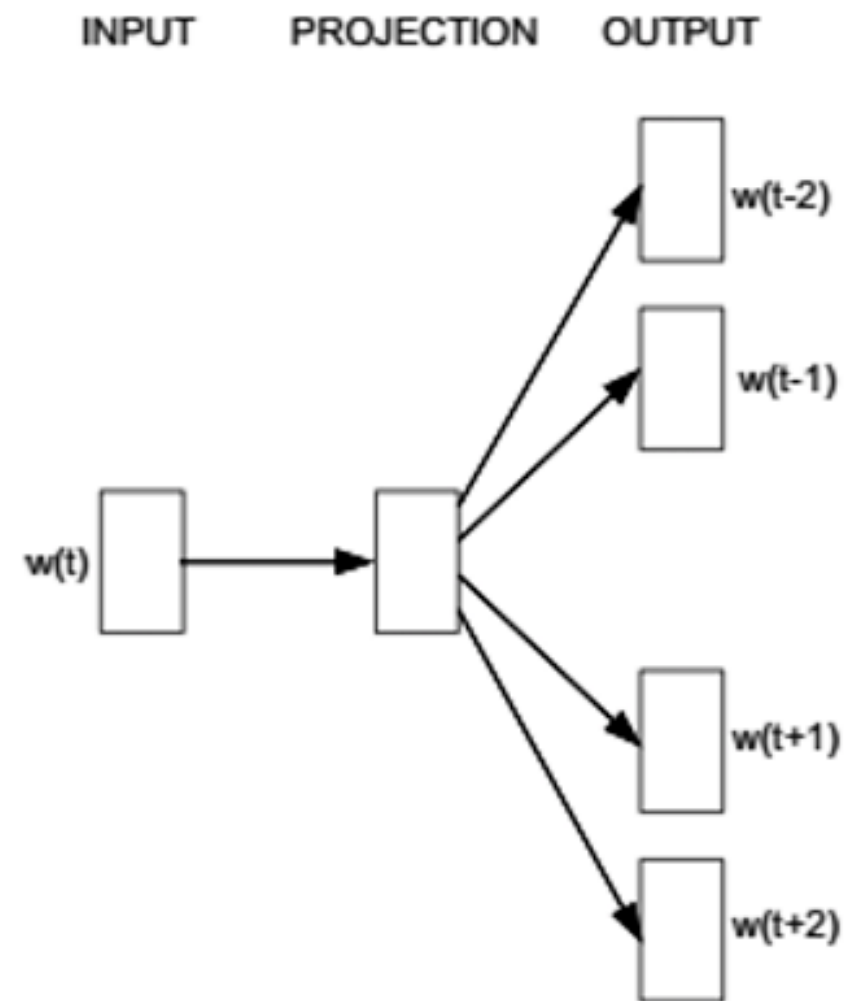


**Skip-gram**



# Word2vec


- Skip-gram — predicts surrounding “outside” words given the “center” word

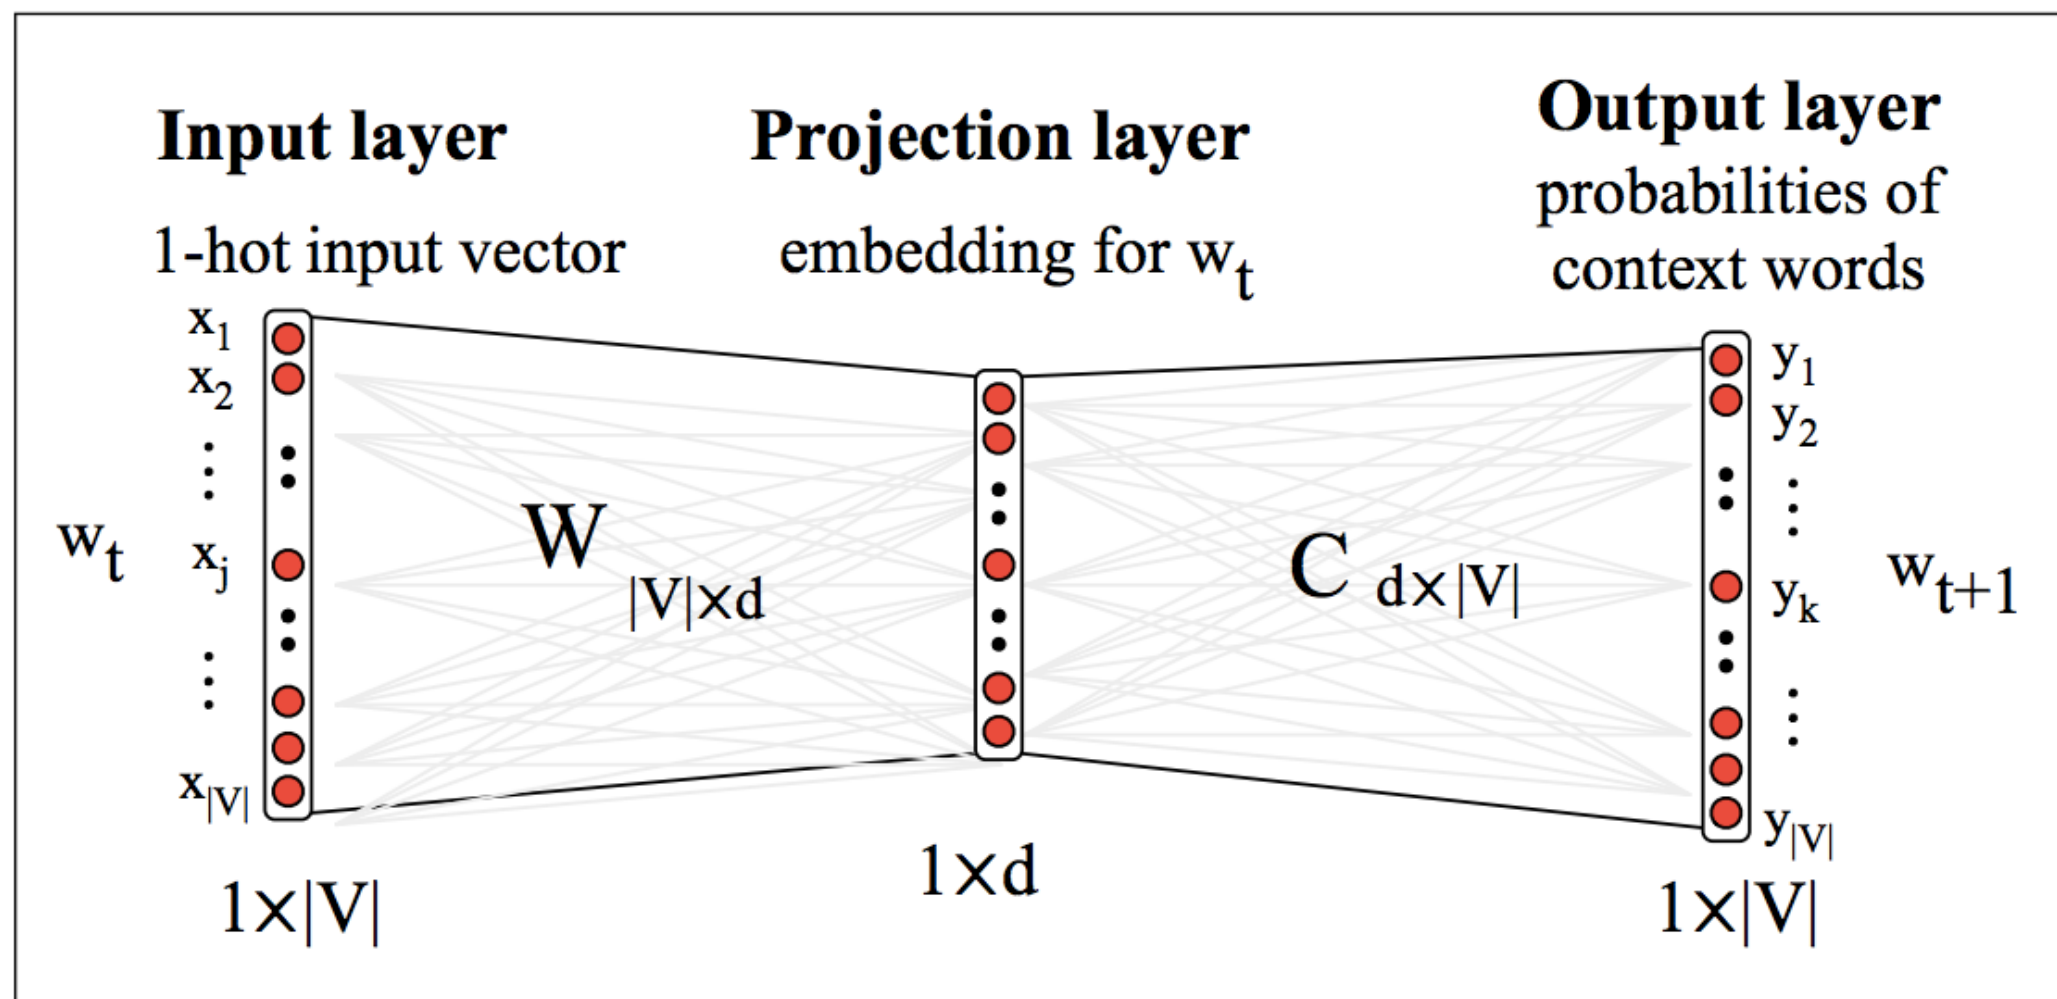

**Figure 16.5** The skip-gram model viewed as a network (Mikolov et al. 2013, Mikolov et al. 2013a).


# Input Layer

- “one-hot” word vectors
  - a vector of dimension  $|V|$  (size of vocabulary)
  - all “0”s except a single “1” in the vector
  - different positions of that “1” represent different words

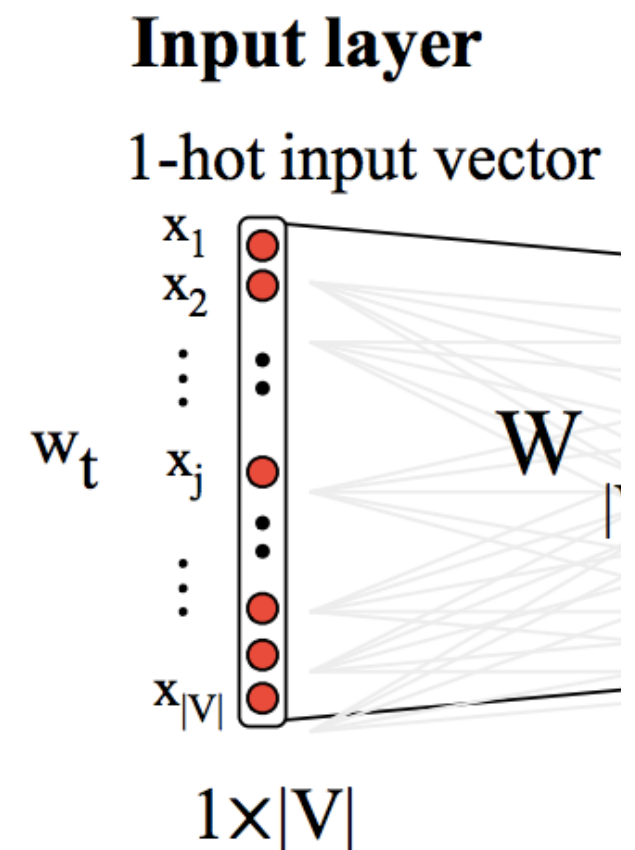

# Hidden (Projection) Layer


- A simple look up — the rows of this weight matrix are actually “input” word vectors

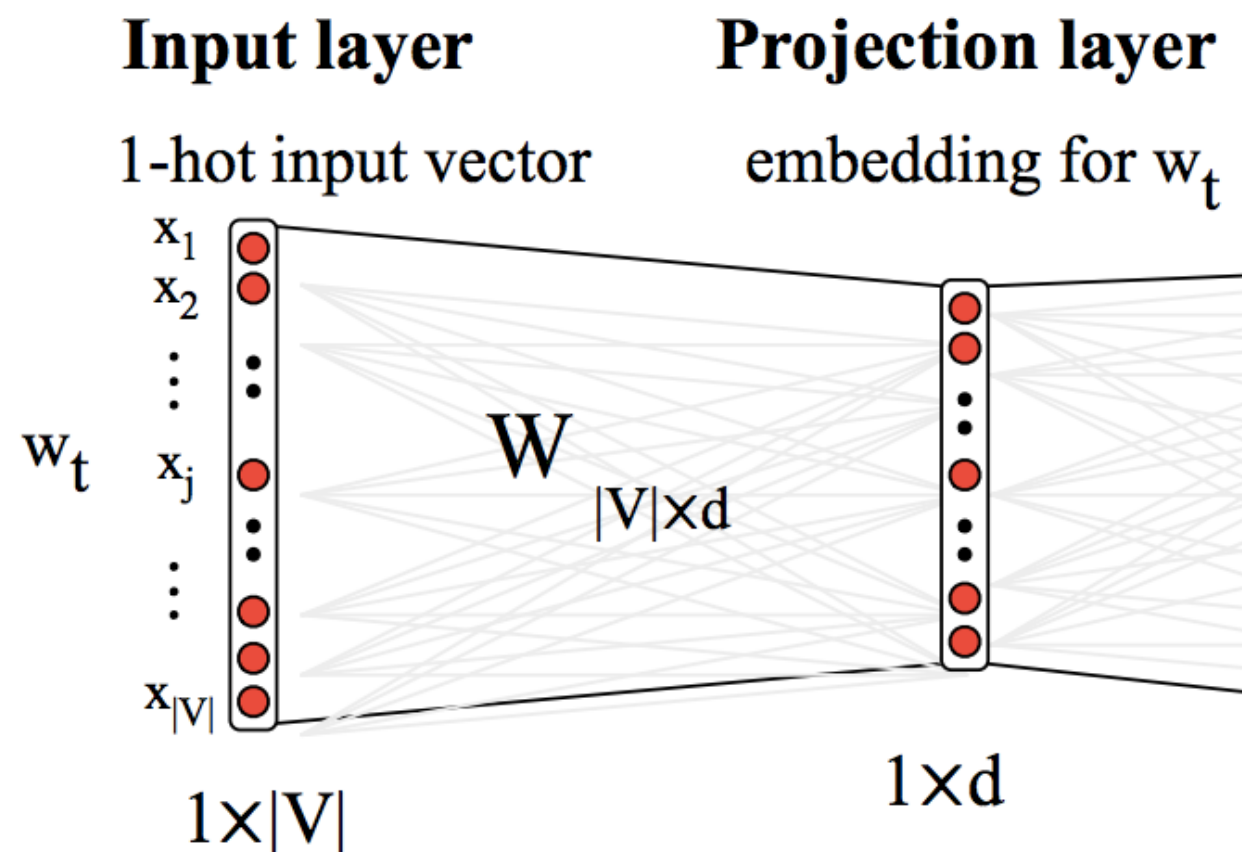

# Hidden (Projection) Layer


- A simple look up — the rows of this weight matrix are actually “input” word vectors

$$[0 \quad 0 \quad 0 \quad \boxed{1} \quad 0] \times \begin{bmatrix} 17 & 24 & 1 \\ 23 & 5 & 7 \\ 4 & 6 & 13 \\ \boxed{10} & \boxed{12} & \boxed{19} \\ 11 & 18 & 25 \end{bmatrix} = [10 \quad 12 \quad 19]$$

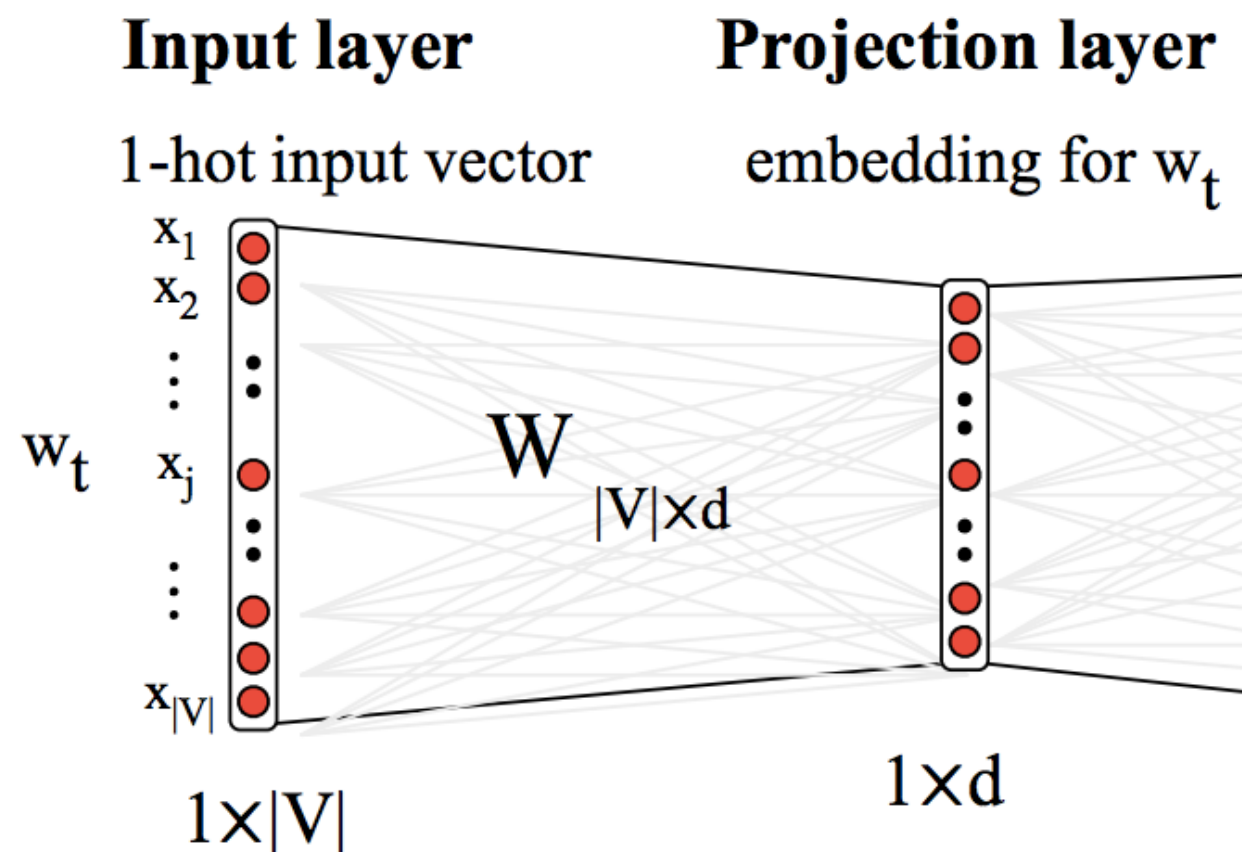

# Output Layer


- predicts surrounding “outside” (context) words given the “center” word  $\rightarrow$  A classification problem!
- Softmax Regression = Multi-class Logistic Regression

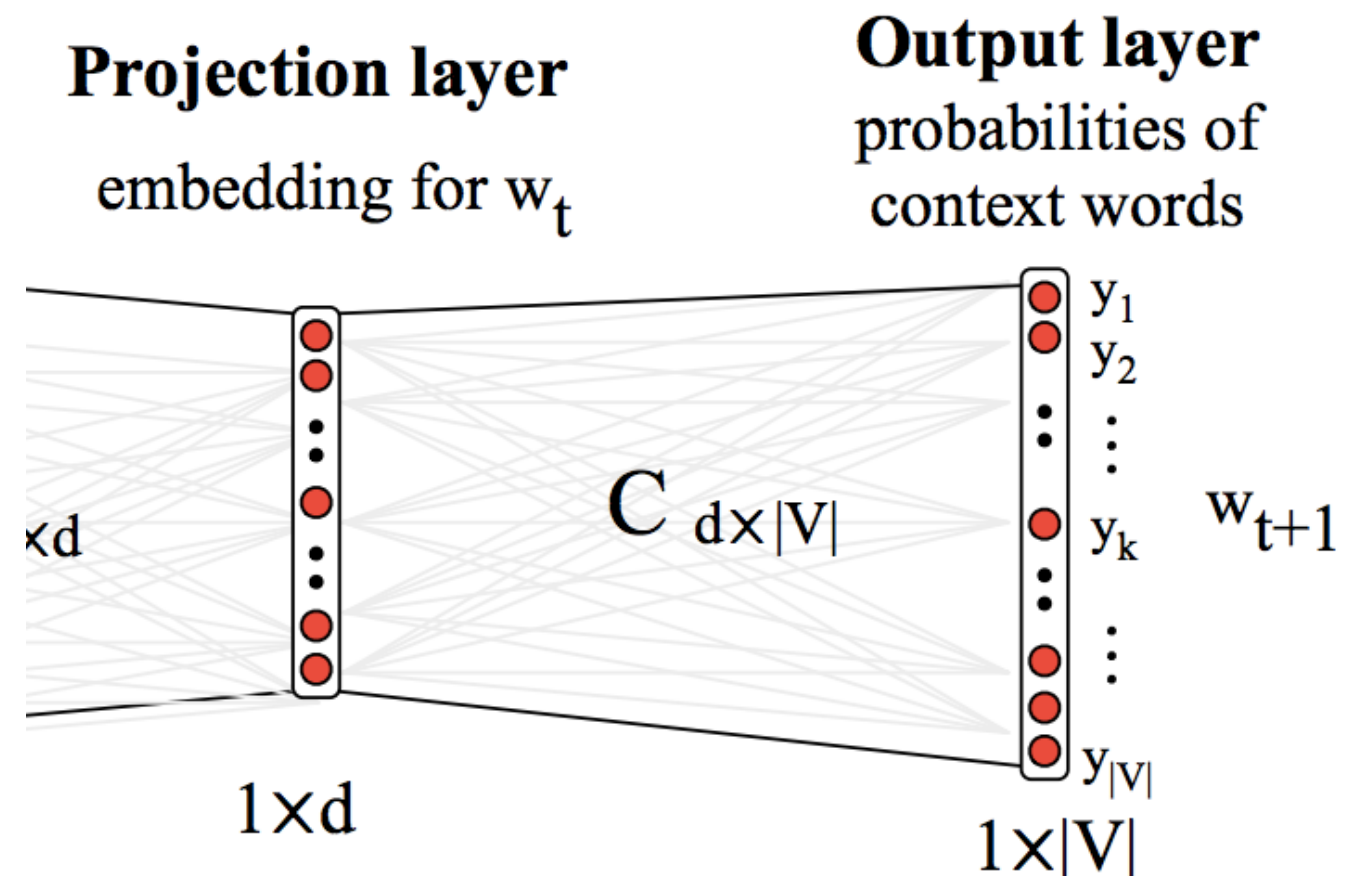


# Softmax Function

- Softmax function is a generalization of logistic function

$$\text{softmax}(\mathbf{x})_i = \frac{e^{x_i}}{\sum_j e^{x_j}}$$

 **exponentiate to make positive**


 **normalized to give probability**



# Softmax Function


- Softmax function is a generalization of logistic function

$$\text{softmax}(\mathbf{x})_i = \frac{e^{x_i}}{\sum_j e^{x_j}}$$

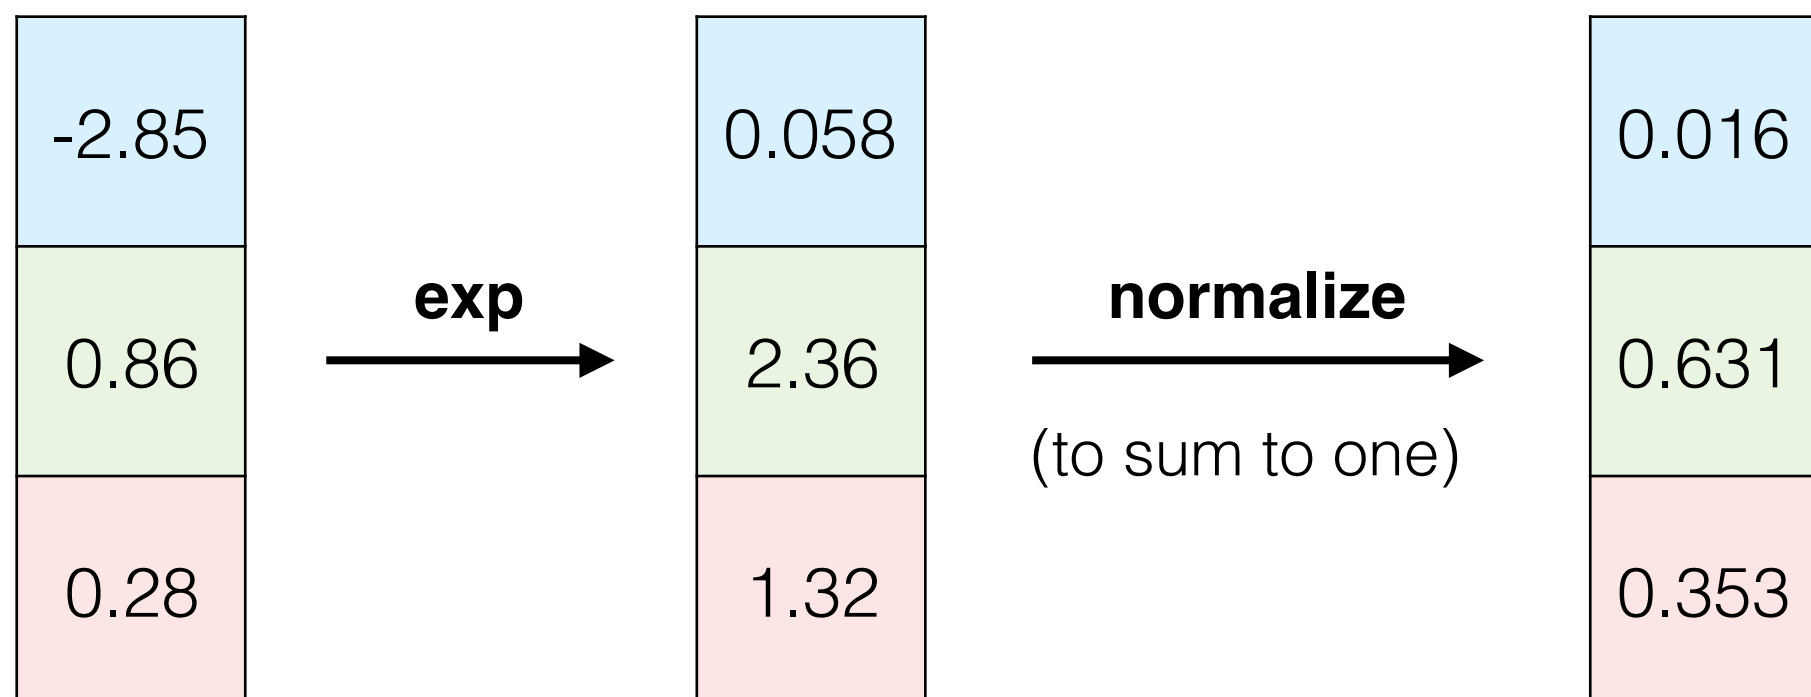

# Output Layer


- Intuition

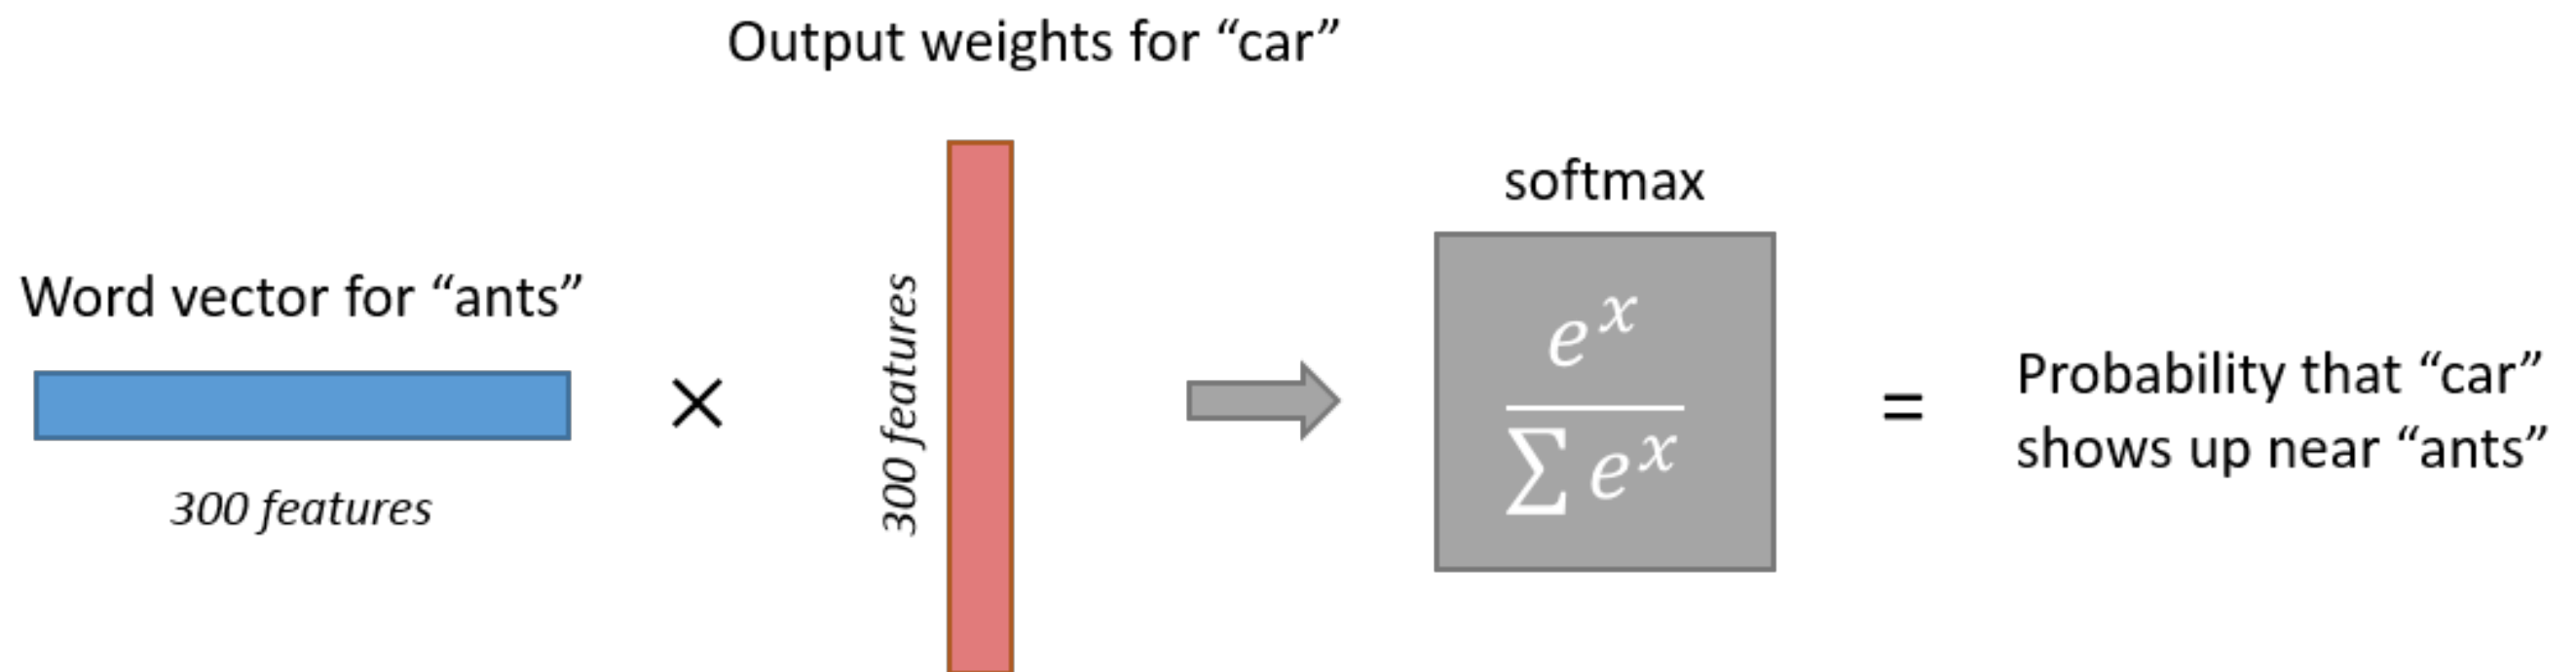

# Output Layer

- Objective function: maximize the log probability of any “outside” (context) word given the “center” word

$$J(\theta) = \frac{1}{T} \sum_{t=1}^T \sum_{-m \leq j \leq m, j \neq 0} \log p(w_{t+j} | w_t)$$

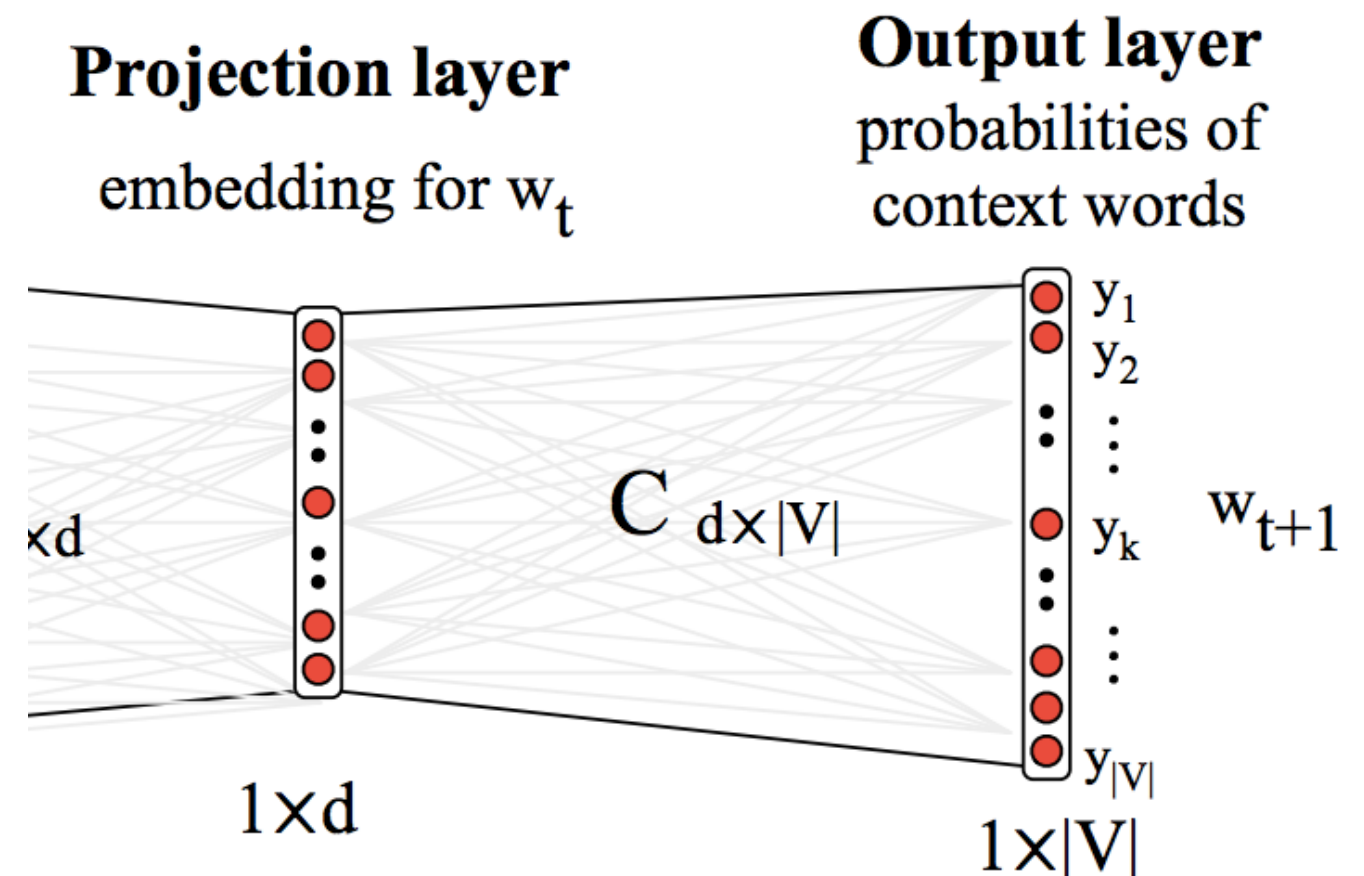


# Output Layer

- predicts surrounding “outside” (context) words given the “center” word

$$p(o|c) = \frac{\exp(u_o^T v_c)}{\sum_{w=1}^W \exp(u_w^T v_c)}$$

- so, every word has two vectors!

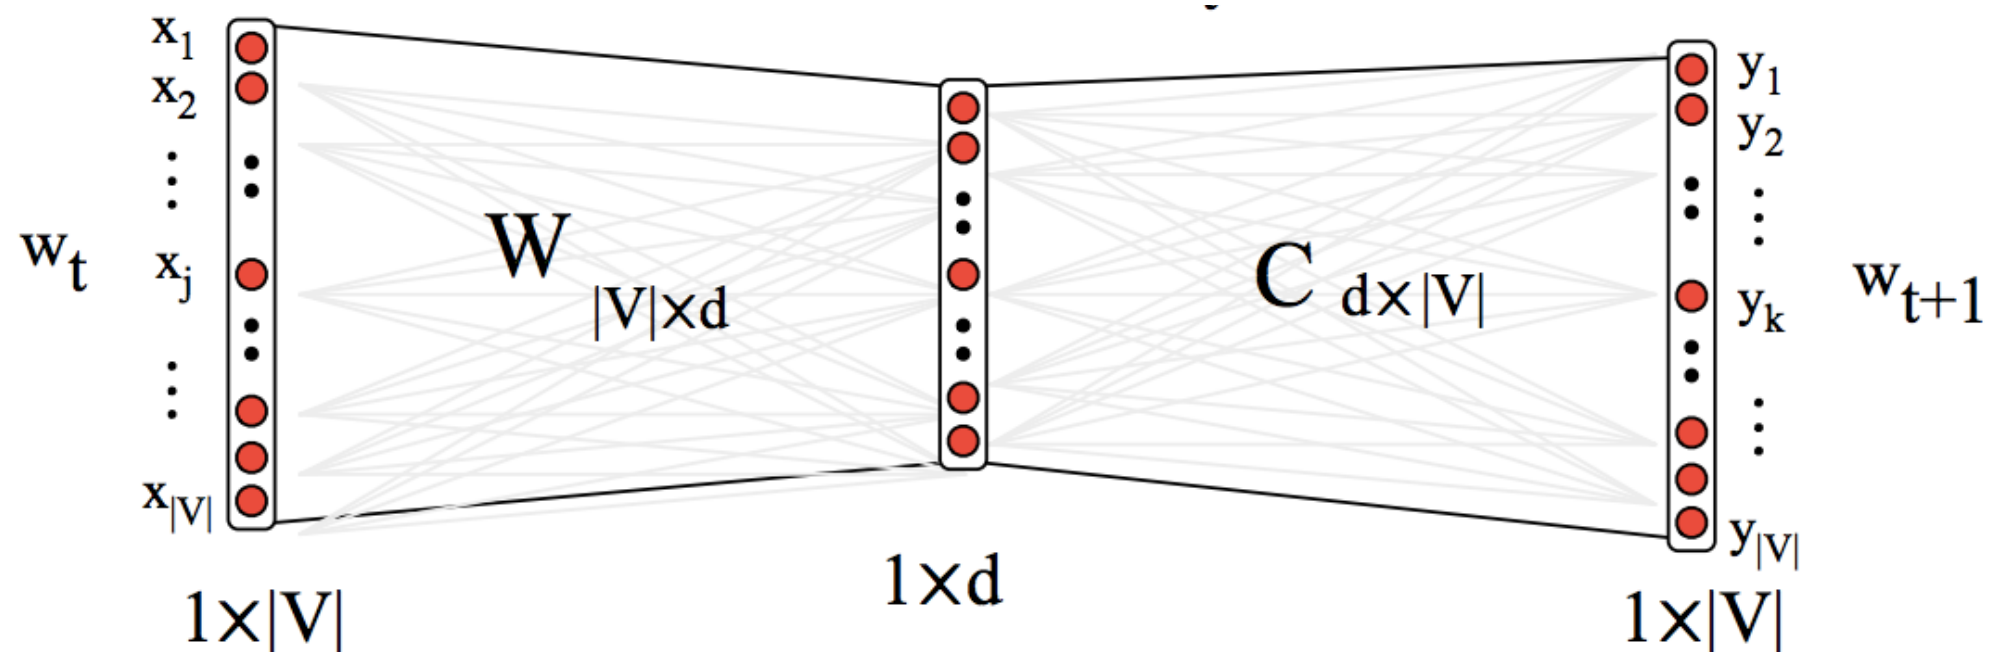

# Gradient Descent

- Cost/Objective function:

$$J(\theta) = \frac{1}{T} \sum_{t=1}^T \sum_{-m \leq j \leq m, j \neq 0} \log p(w_{t+j} | w_t)$$

- For a “center” word and an “outside” word:

$$\log p(o|c) = \log \frac{\exp(u_o^T v_c)}{\sum_{w=1}^W \exp(u_w^T v_c)}$$

# Gradient Descent

- Basics:


$$\frac{\partial \mathbf{x}^T \mathbf{a}}{\partial \mathbf{x}} = \frac{\partial \mathbf{a}^T \mathbf{x}}{\partial \mathbf{x}} = \mathbf{a}$$

$$\frac{\partial e^{\mathbf{x}}}{\partial \mathbf{x}} = e^{\mathbf{x}} \qquad \frac{\partial \log \mathbf{x}}{\partial \mathbf{x}} = \frac{1}{\mathbf{x}}$$

- Chain Rule:

$$\frac{\partial f}{\partial x} = \frac{\partial f}{\partial g} \frac{\partial g}{\partial x} = \frac{\partial f(g)}{\partial g} \frac{\partial g(x)}{\partial x}$$

# Skipgram

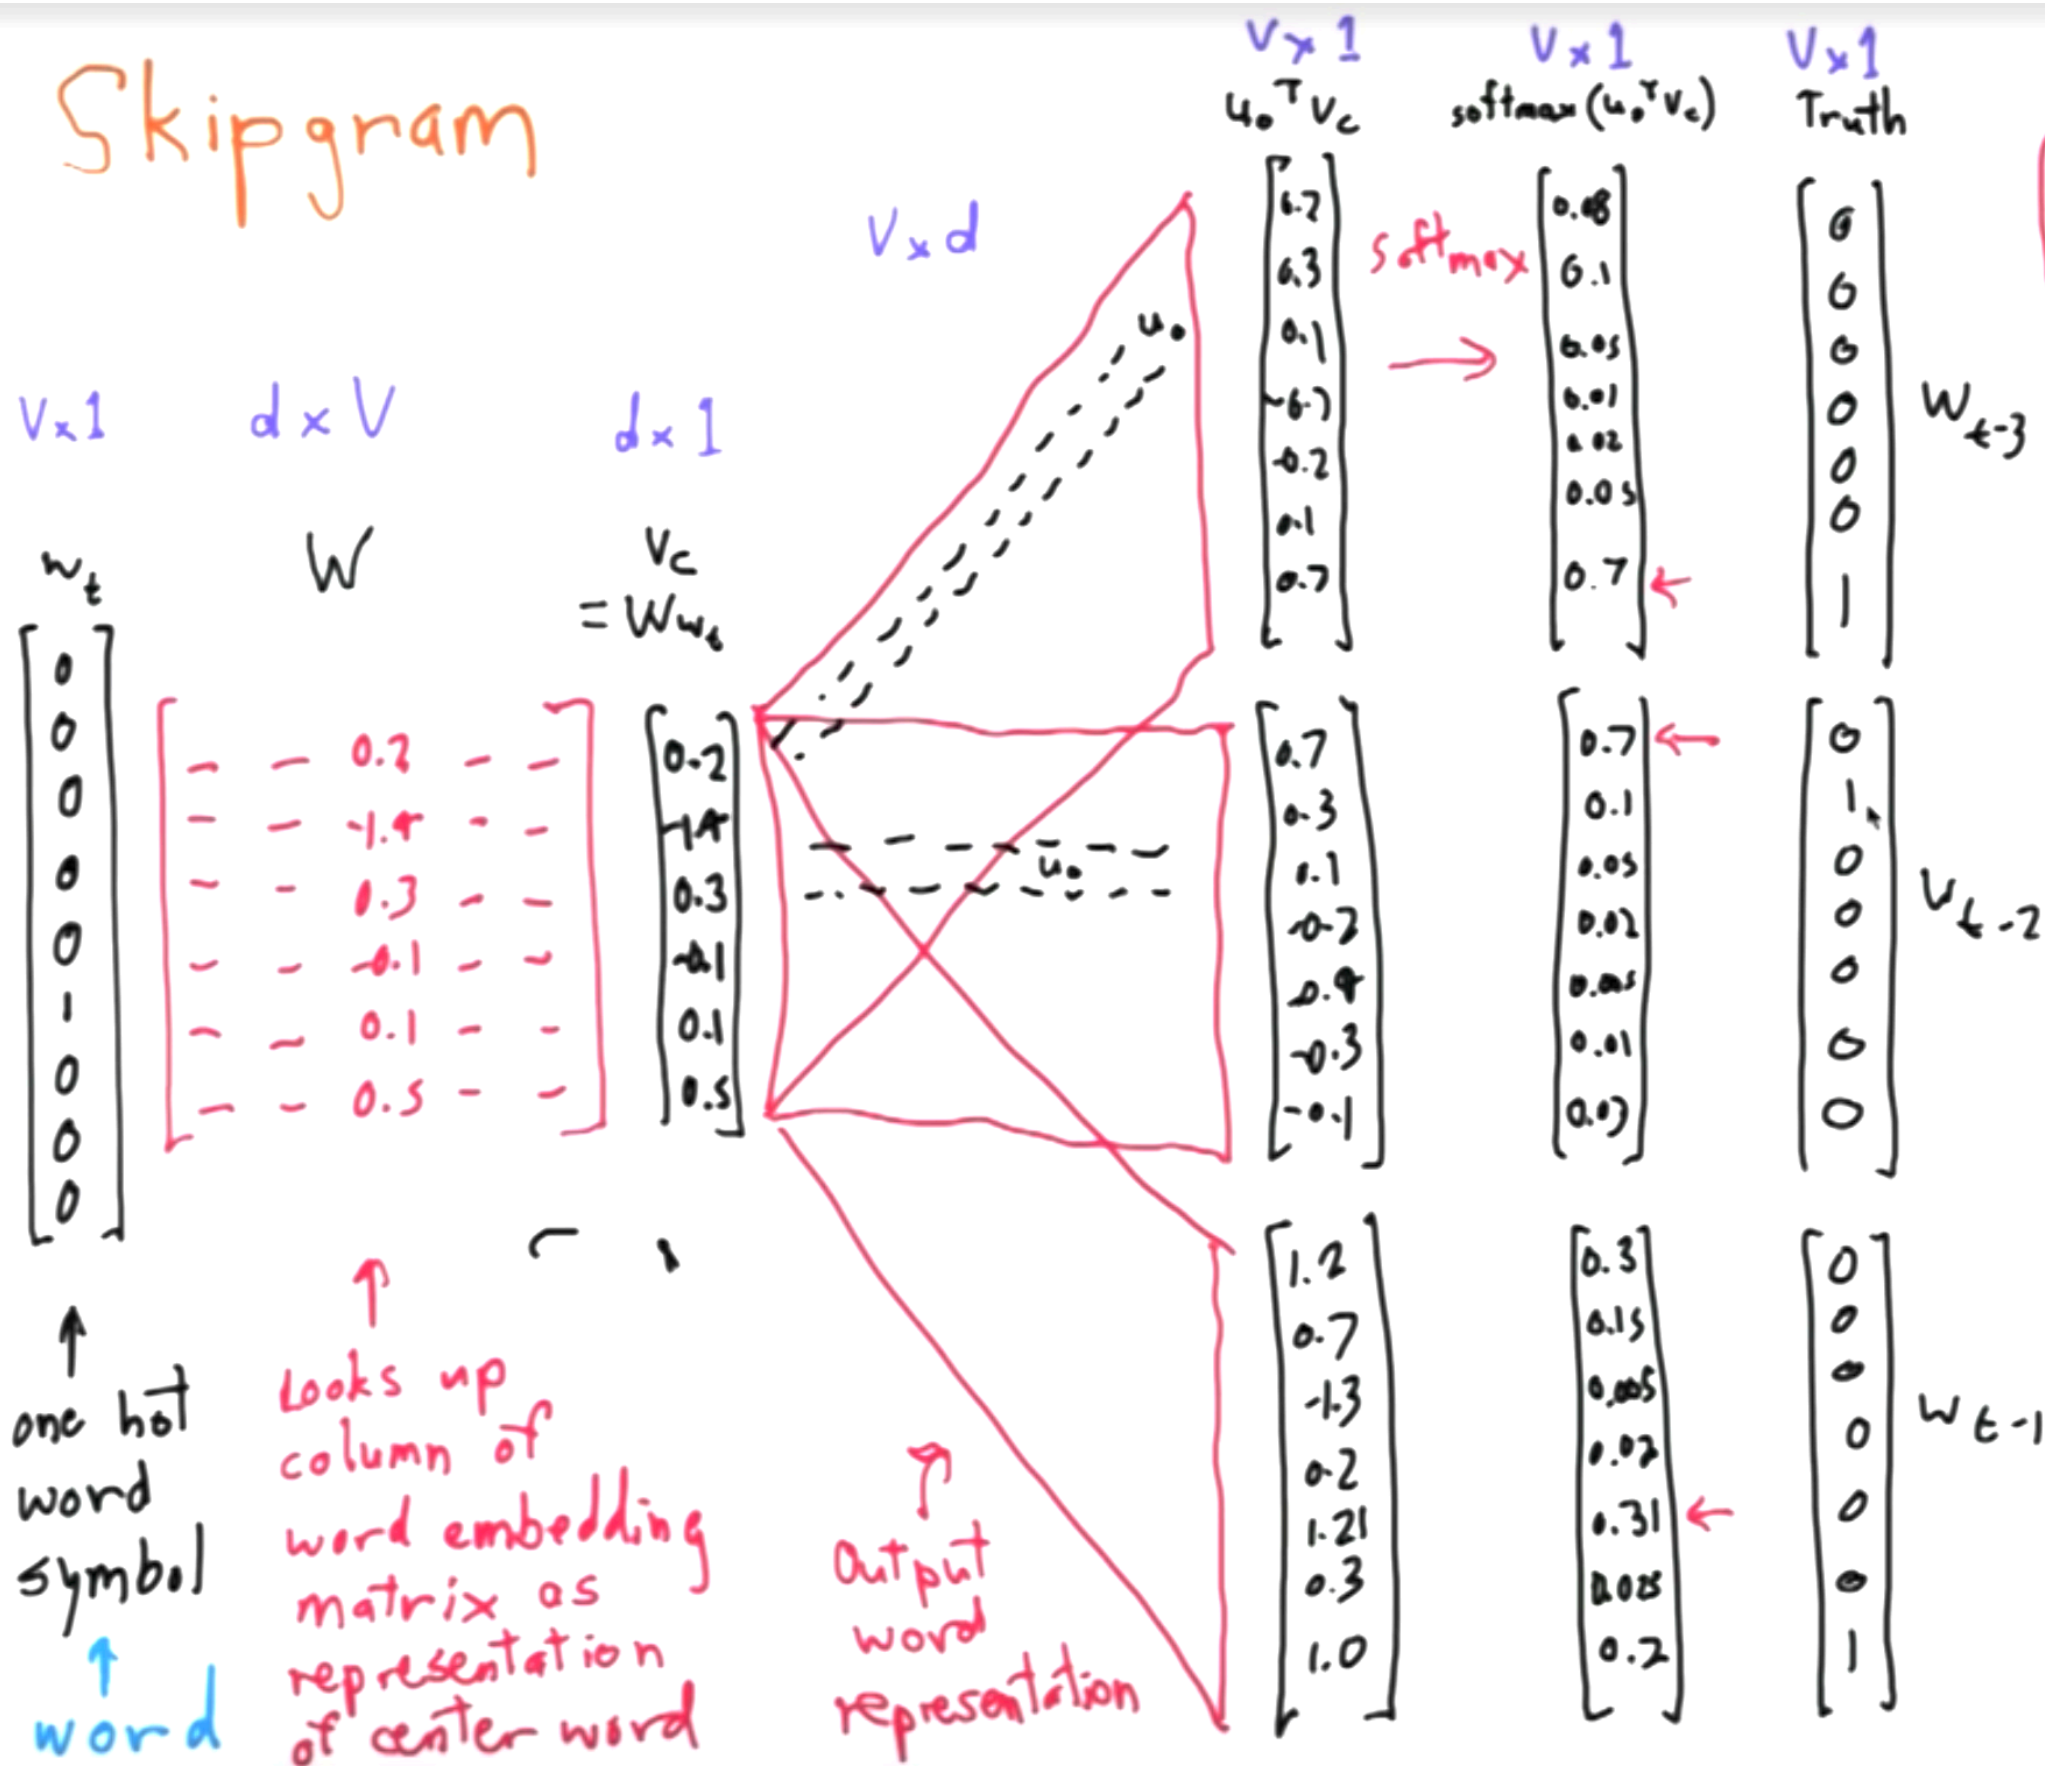

softmax

$$p_i = \frac{e^{x_i}}{\sum_j e^{x_j}}$$

# Word Vector Representations

(a.k.a. “word embeddings”)

- 4 kinds of vector semantic models

**dense** •

1. Hard clustering (e.g. Brown clustering)
2. Soft clustering (e.g. SVD, LSA, LDA)
3. Neural Network inspired models  
(e.g. skip-grams and CBOW in word2vec)

**sparse** •

4. Mutual-information weighted word co-occurrence metrics



# Word2vec

- Word2vec is not a single algorithm, but a toolkit
  - which contains two distinct algorithms (Skip-gram & CBOW), two training methods (negative sampling & hierarchical softmax)
- Word2vec is not deep learning, but neural-inspired
  - only one hidden layer followed by softmax, no non-linear activation function

Learn more: Omer Levy's answer on Quora

# Word2vec

- Word2vec is not a single algorithm, but a toolkit
  - which contains two distinct algorithms (Skip-gram & CBOW), two training methods (negative sampling & hierarchical softmax)
- Word2vec is not deep learning, but neural-inspired
  - only one hidden layer followed by softmax, no non-linear activation function

Learn more: Omer Levy's answer on Quora

# Relation between Skip-gram and SVD


- Levy and Goldberg (2014) show that skip-gram is factorizing (a shifted version of) the traditional word-context PMI matrix:

$$Opt(\vec{w} \cdot \vec{c}) = PMI(w, c) - \log k$$


The diagram shows the matrix multiplication of a word matrix  $W$  and a context matrix  $C$  to produce a PMI matrix  $M^{PMI}$ . Matrix  $W$  is a blue grid with dimensions  $V_w$  (height) and  $d$  (width). Matrix  $C$  is an orange grid with dimensions  $d$  (height) and  $V_c$  (width). The resulting matrix  $M^{PMI}$  is a yellow grid with dimensions  $V_w$  (height) and  $V_c$  (width). The equation is represented as  $W \cdot C = M^{PMI} - \log k$ .

- So does SVD!


# Visualization

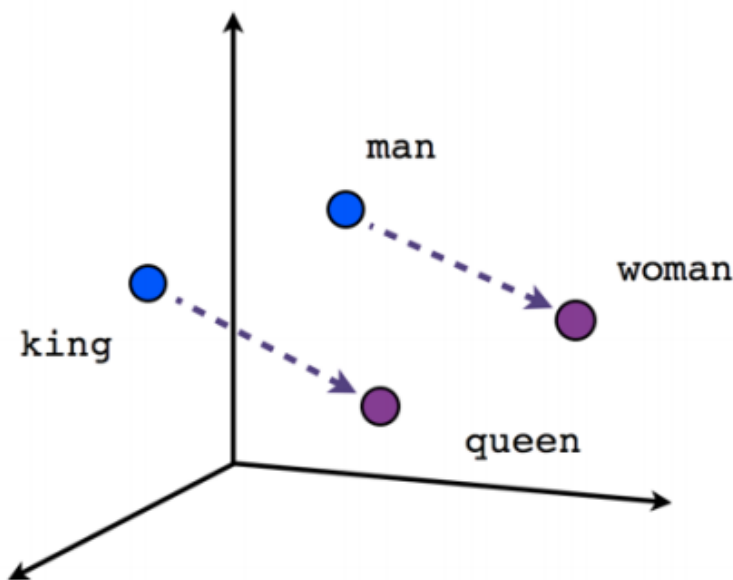

Male-Female

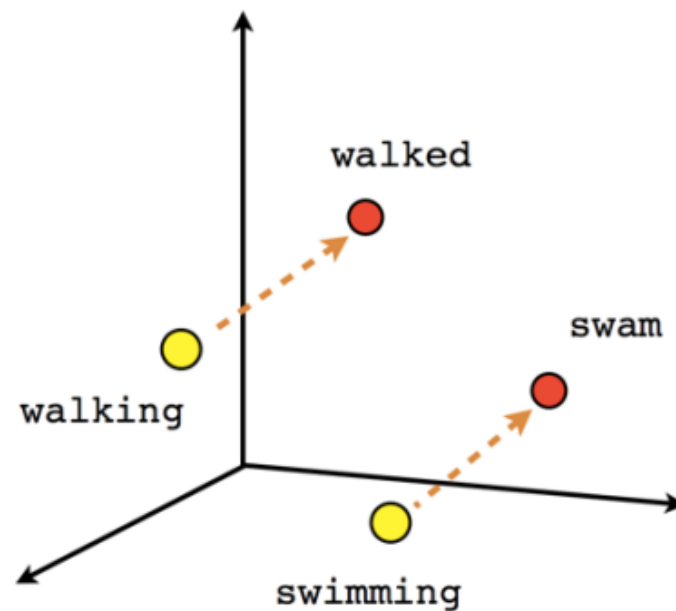

Verb tense

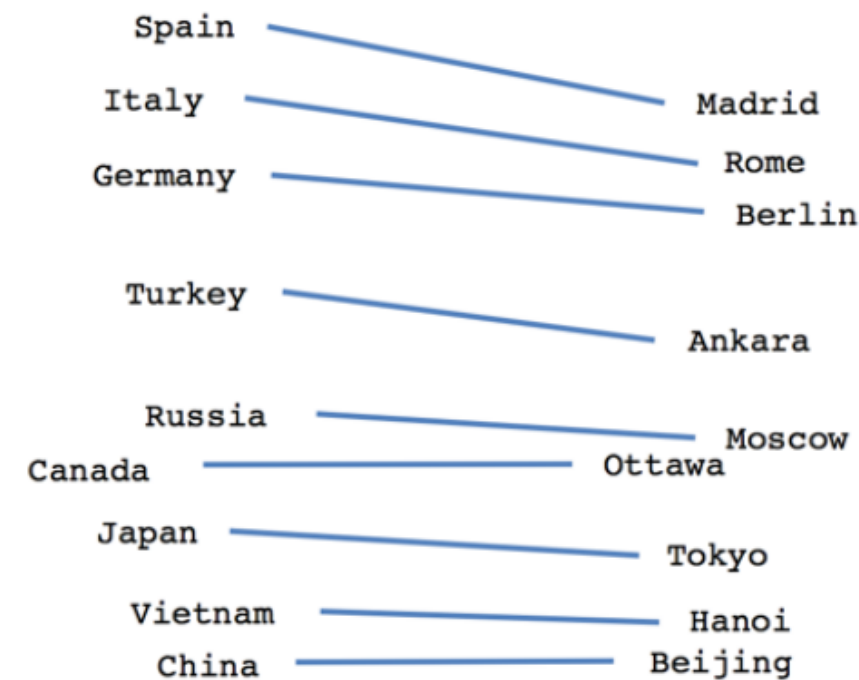

Country-Capital

# Visualization


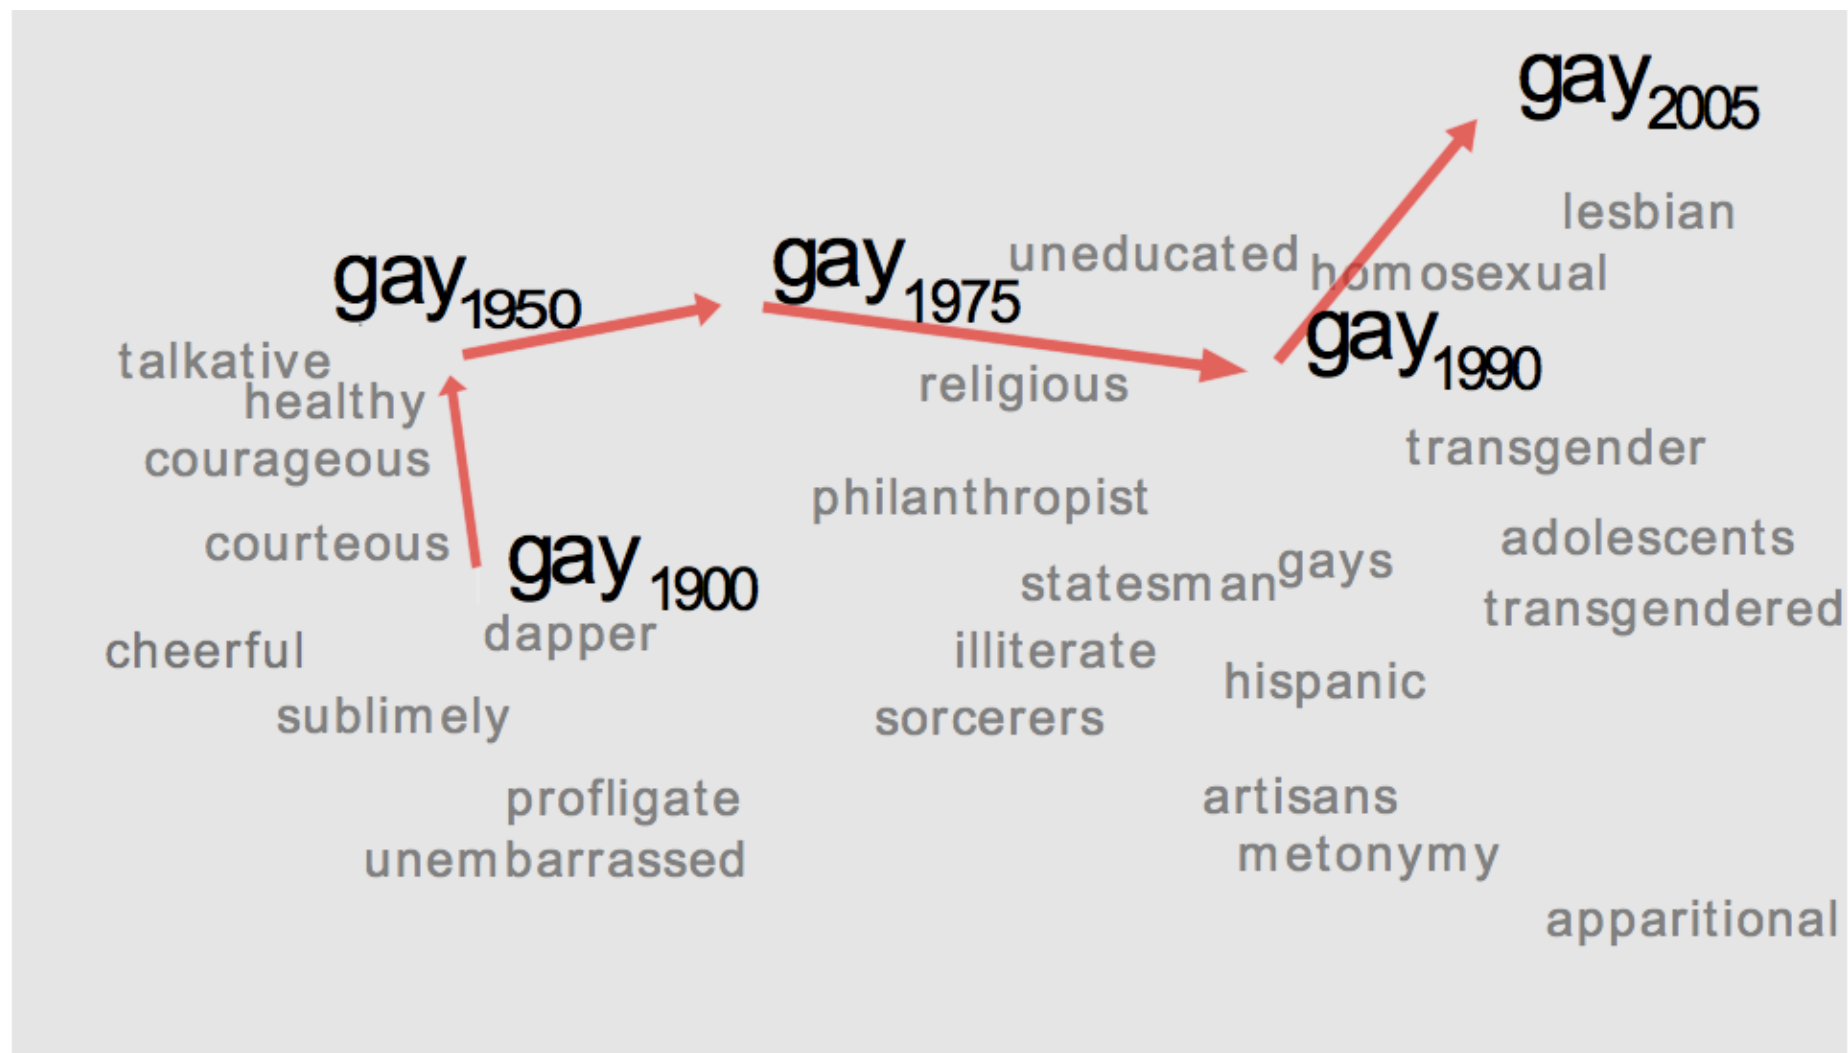


Figure 1: A 2-dimensional projection of the latent semantic space captured by our algorithm. Notice the semantic trajectory of the word **gay** transitioning meaning in the space.

# Thank You!



**Instructor: Wei Xu**

**[www.cis.upenn.edu/~xwe/](http://www.cis.upenn.edu/~xwe/)**

**Course Website: [socialmedia-class.org](http://socialmedia-class.org)**